



THE UNITED KINGDOM VEHICLE APPROVAL AUTHORITY

COMMUNICATION CONCERNING THE APPROVAL GRANTED ⁽⁴⁾/~~APPROVAL EXTENDED ⁽⁴⁾/~~
~~APPROVAL REFUSED ⁽⁴⁾/~~ ~~APPROVAL WITHDRAWN ⁽⁴⁾/~~ ~~PRODUCTION DEFINITELY~~
~~DISCONTINUED ⁽⁴⁾~~ OF A TYPE OF PROTECTIVE HELMET WITH ~~WITHOUT ⁽⁴⁾/~~ ONE ~~MORE THAN~~
~~ONE ⁽⁴⁾~~ VISOR TYPE(S) PURSUANT TO REGULATION NO. 22.05



Approval No: 22R-050520/P

Extension No: Not applicable

1. Trade marks: BELL
2. Type: BULLITT
3. Sizes: XS 54/55 S 55/56 M 57/58-L 58/59 XL 60/61-XXL 62/63
4. Manufacturer's name: Xiamen Yeu Chuan Composite Technology Co., Ltd.
5. Address:
No. 60. Xingnan Road, Xinglin, Jimei
Xiamen, China
Postal Code: 361022
6. If applicable, name of manufacturer's representative: Not applicable
7. Address: Not applicable
8. Brief description of helmet: See enclosures

9. Helmet ~~without lower face cover (J) / with protective lower face cover (P) / with non-protective lower face cover (NP)~~ ⁽¹⁾
10. Type of visor or visors: P401-FS-JH (Bullitt Flat Shield) and P401-BS-JH (Bullitt Bubble Shield)
11. Brief description of visor or visors: See enclosures
12. Submitted for approval on: 17 April 2014
13. Technical service responsible for conducting approval tests: Omega S.r.l.
14. Date of report issued by that service: 29 April 2014
15. Number of report issued by that service: MAP290116
16. Comments: No comments
17. Approval ~~GRANTED/EXTENDED/REFUSED/WITHDRAWN~~ ⁽¹⁾
18. Place: BRISTOL
19. Date: 07 AUGUST 2014
20. Signature:  A. W. STENNING
Head of Technical and Quality Support Group
21. The following documents, bearing the approval number shown above, are available on request

Any remarks: Approval to Supplement 2

(1) Strike out what does not apply.



BELL SPORTS INC.

	Scheda Informativa redatta sulla base del Regolamento ECE/ONU n° 22 emendamento 05	Scheda Informativa n° BULLITT/14/00
	Casco: BULLITT	Data 17/07/2014

Helmet type/*casco tipo*: BULLITT (Full Face)

Trade mark/*marchio di fabbrica o di commercio*: BELL

Manufacturer's name: Xiamen Yeu Chuan Composite Technology Co., Ltd.

Manufacturer's address: No. 60. Xingnan Road, Xinglin, Jimei
Xiamen, China
Postal Code: 361022

Weight/*peso*: g 1375 ± 50 – g 1450 ± 50

Size range/*gamma taglie*: XS 54/55 S 55/56 M 57/58-L 58/59 XL 60/61-XXL 62/63

Size+mm	External shell	EPS Liner	EPS Thickness (mm)	EPS density + top zone density (g/l)	EPS weight (gr)	Pudding comfort Thickness (mm)
XS 53/54	S	S	33/41	30g/l – 40g/l	100	18
S 55/56	S	S	33/41	30g/l – 40g/l	100	16
M 57/58	M	M	33/41	30g/l – 40g/l	125	18
L 58/59	M	M	33/41	30g/l – 40g/l	125	16
XL 61/62	L	L	33/41	35g/l – 45g/l	145	16
XXL 63/64	L	L	33/41	35g/l – 45g/l	145	10

External shell/*calotta esterna*: Composite Fiberglass 3 Sizes /*fibra di vetro 3 calotte*
thickness/ *spessore* 2.5-3mm ±1 mm (all shells same)

Shields/*visiere*: Mod. P401-FS-JH (Bullitt Flat Shield)
Mod. P401-BS-JH (Bullitt Bubble Shield)
Polycarbonate injected/*policarbonato stampato*

Liner/*Imbottitura di protezione*: EPS Expanded polystyrene/*polistirolo espanso* 3 size (tab).

Comfort pudding/ *Imbottitura di protezione*: Expanded polyurethane + syntethic textile/
poliuretano espanso e tessuto sintetico spessore variabile in funzione della taglia

Chin rest/*Mentoniera*: P- FULL FACE/ *P-PROTETTIVA*
Expanded Polystyrene , Polyurethane and Leather
Polistirolo, poliuretano e pelle

Buckle/*Fibbia*: D-Rings/*Anelli doppia D* : stainless steel/*acciaio*
Quick release /*sgancio rapido*: Acetal Injection Pull Tab

Chin strap/*Cinturino*: Nylon 24 mm





BELL SPORTS INC.

	Scheda Informativa redatta sulla base del Regolamento ECE/ONU n° 22 emendamento 05	Scheda Informativa n° BULLITT/14/00
	Casco: BULLITT	Data 17/07/2014

Rivets/Rivetti: Stainless steel/acciaio

Anchorage/Staffe: Stainless steel/acciaio

Reflective Bands: Yes

Declaration: The characteristics of the materials used in manufacture of the helmet don't suffer alterations following the normal use of the helmet. For the part in contact with the skin it is used materials that don't cause allergy and are transpiring. These materials don't suffer from the variations due to sweating or to products used for the personal hygiene. These materials don't cause dermal problems.

Idoneità dei materiali:

I materiali utilizzati nella fabbricazione dei caschi sono adeguati all'uso e, in particolare per quelli a contatto con la pelle, sono noti per non subire modifiche per effetto del sudore o prodotti per l'igiene personale e per non causare problemi dermatologici. Sarà nostra cura comunicare tutte le variazioni che si effettuano e verificare l'adeguatezza dei materiali impiegati per la produzione del casco.

BRAND AND LABELS/POSIZIONAMENTO DELLE MARCATURE OBBLIGATORIE

Trade mark/ Marchio di fabbrica o di commercio: on frontal and rear external shell +brand inside the shell under the EPS./ Sulla calotta esterna marchio posizionato in fronte e dietro + marchio costruttore posizionato all'interno della calotta

Size label/ Indicazione delle misure: Adhesive label on the rear external shell/ Sul retro del casco mediante una etichetta adesiva

Approval label/ Etichetta omologativa: on the chin strap/ Cucita al sistema di ritenuta

Weight /Massa del casco: Adhesive label on the rear external shell/ Sul retro accanto alla taglia

Bell Sports Inc.

Aaron Michael Torres
Technical person Responsible





BELL SPORTS INC.

HELMET TYPE: Full Face


BRAND: Bell

MODEL: BULLITT


NUMBER (#)	DESCRIPTION	REFERENCE DOCUMENT
①	Iso View / <i>vista isometrica</i>	destra dx SEE: Helmet_Specs_Bullitt DOC
②	Lateral Right View / <i>vista laterale</i>	
③	Cross Section Right View / <i>sezione</i>	
④	Front View / <i>vista frontale</i>	
⑤	Top View / <i>vista superiore</i>	
⑥	Cross Section Left View / <i>sezione sx</i>	
⑦	Main dimensions of the helmet/visor / <i>dimensioni principali</i>	fibra di vetro SEE: Shell_Fiberglass_Specs_P401 DOC
⑦.1	Small / S	
⑦.2	Med / M	
⑦.3	Large / L	
⑧	External shell : material and n° of shell EPS density / <i>calotta esterna</i>	fibra di vetro SEE: Shell_Fiberglass_Specs_P401 DOC
⑨	EPS Details Density & Thickness (mm) of EPS / <i>imbottitura di protezione</i>	eps SEE: EPS_Specs_Main_P401 DOC
⑩	Interior Comfort Padding / <i>imbottitura conforto</i>	poliuretano + tessuto SEE: Pad_Matrix_Bullitt DOC
⑪	Exterior Labels / <i>marcature esterne</i>	destra dx SEE: Helmet_Specs_Bullitt DOC
⑫	Interior Labels / <i>marcature esterne</i>	
⑬	Packaging / <i>manuale istruzioni</i>	
⑭	Retention system / <i>sistema di ritenuta</i>	
⑮	Rivets / <i>rivetti</i>	
⑯	Anchorage / <i>staffe</i>	
⑰	Shield/ <i>visiera</i>	visiera SEE: Bubble/Flat_Shield_Specs DOC
⑱	Chin rest material / <i>materiale mentoniera</i>	destra dx SEE: Helmet_Specs_Bullitt DOC
⑲	Weight / <i>peso</i>	SEE: Finished_Weight_Spec_Bullitt DOC




LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	9/5/2013

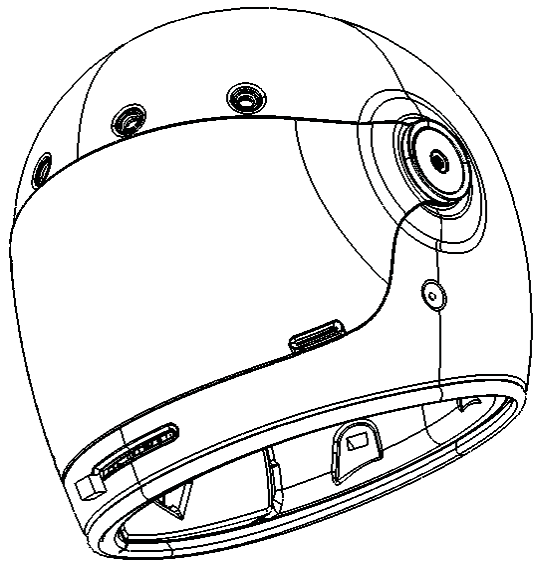

ISOMETRIC VIEW
1

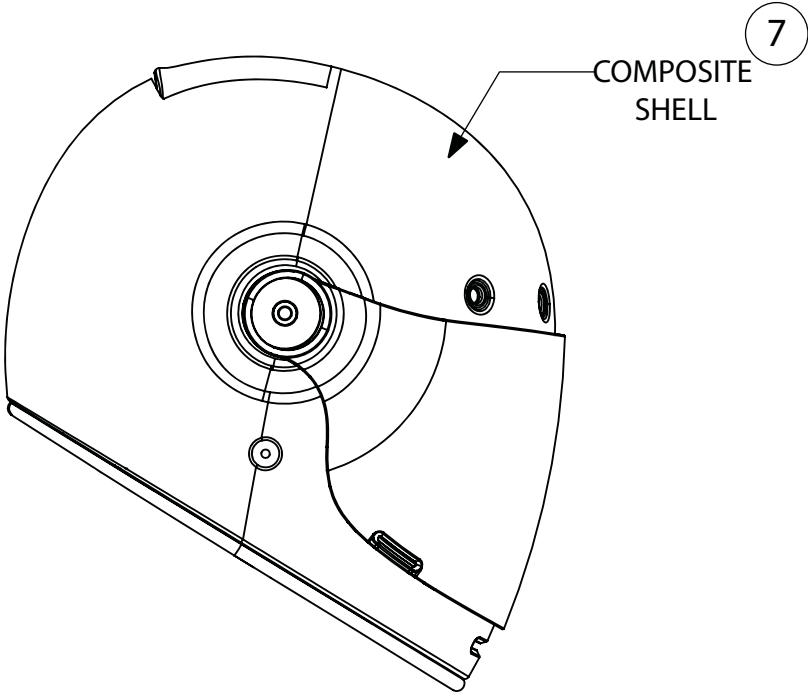


LATERAL RIGHT VIEW
2

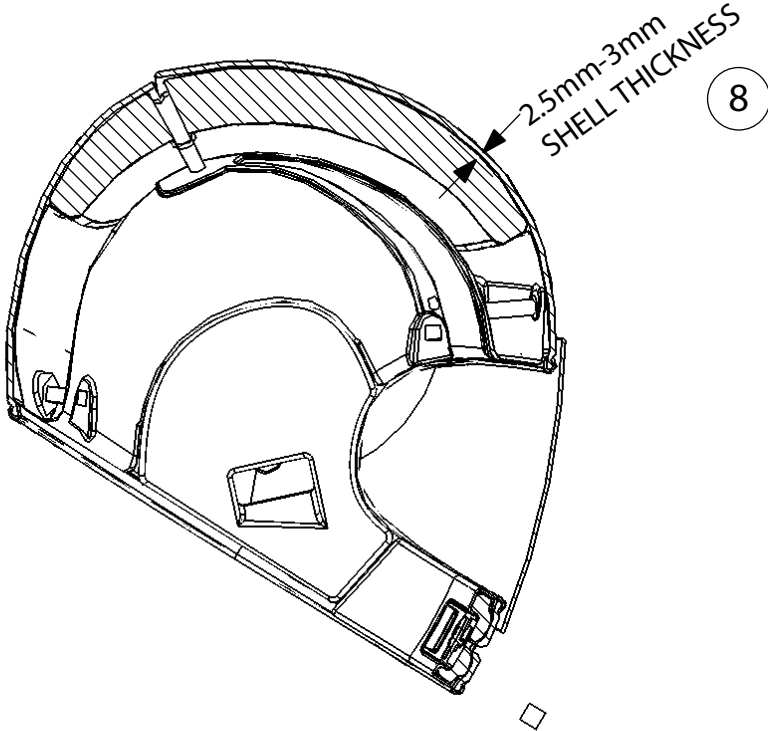


CROSS SECTION
RIGHT VIEW
3


LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<=>	K.BAKER	9/5/2013

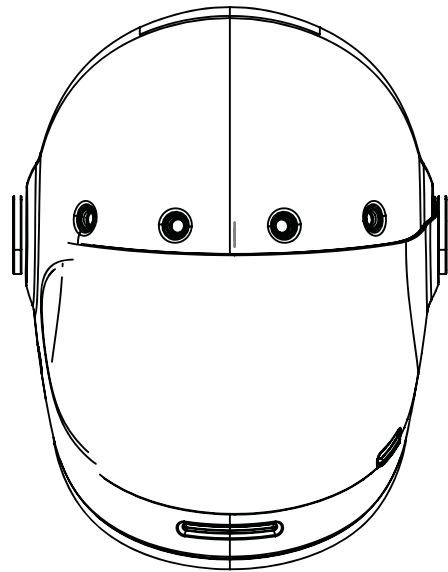

FRONT VIEW 4

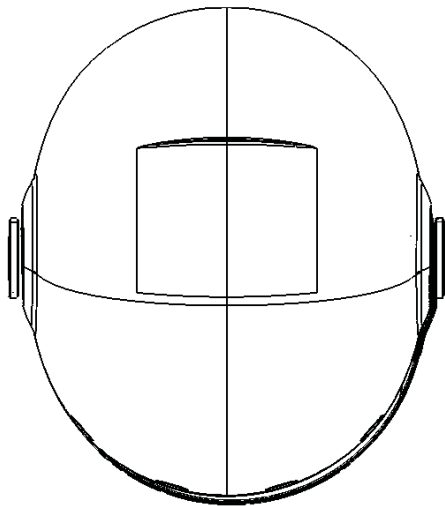


TOP VIEW 5

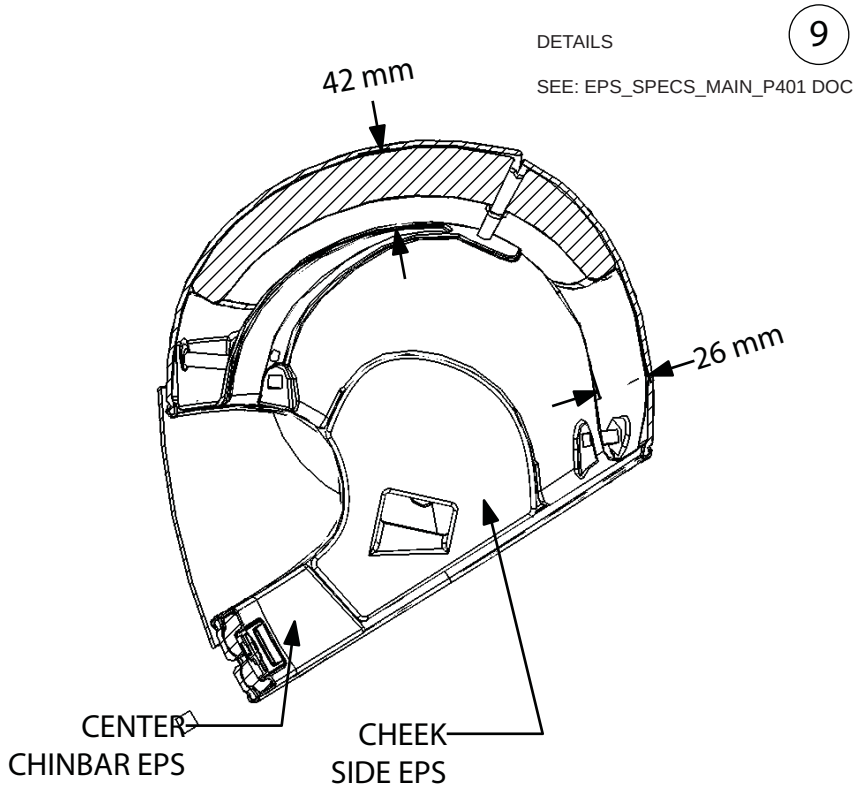

CROSS SECTION VIEW 6

Unless otherwise specified, dimensions are in millimeters. Tolerances are:	DECIMALS	MM	IN.	ANGLES
	X	= ± 3.0	± 0.12	± 1°
	X.X	= ± 1.0	± 0.04	
	X.XX	= ± 0.25	± 0.01	
	X.XXX	= ± 0.13	± 0.005	

HELMET AND GRAPHIC		PART NO.	DWG. SIZE
HELMET SPECS BULLITT		P401	B
SCALE:	CAD FILE:	SHEET:	
N/A	ILLUSTRATOR	1 OF 1	



BULLITT

STRAPPING DETAILS

CHINSTRAP

INTERIOR STRAP COVER
MATERIAL: MICRO SUEDE
COLOR: BLACK OR BROWN

18

ANCHORS
MATERIAL: STAINLESS STEEL
COLOR: SILVER


16

WEBBING
MATERIAL: NYLON
SIZE: 24MM TUBULAR WEBBING

D/RING
MATERIAL: STAILNESS STEEL

14

LEATHER PULL TAB
COLOR: RED

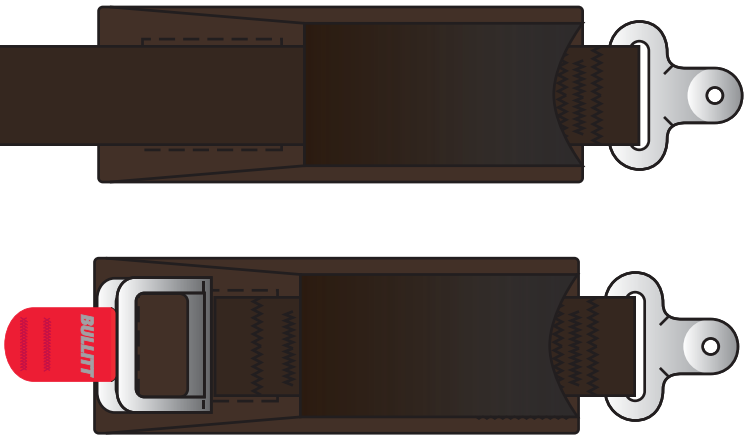

Standard D-Ring

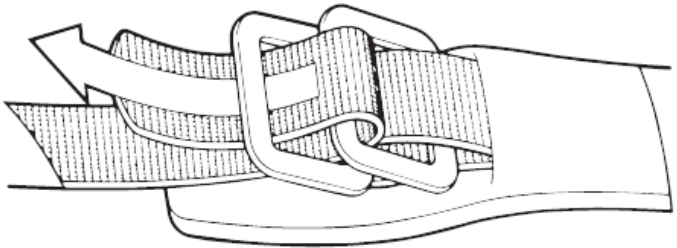


Figure A.



15

RIVET
Material: Steel
Coating: Zinc Plated (silver)
Black ED Coating(black)

MODEL: NAME

GRAPHIC: NAME

DESIGNER: NAME


DATE: 0-0-12

BULLITT

11

EXTERIOR LABELS

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	9/5/2013

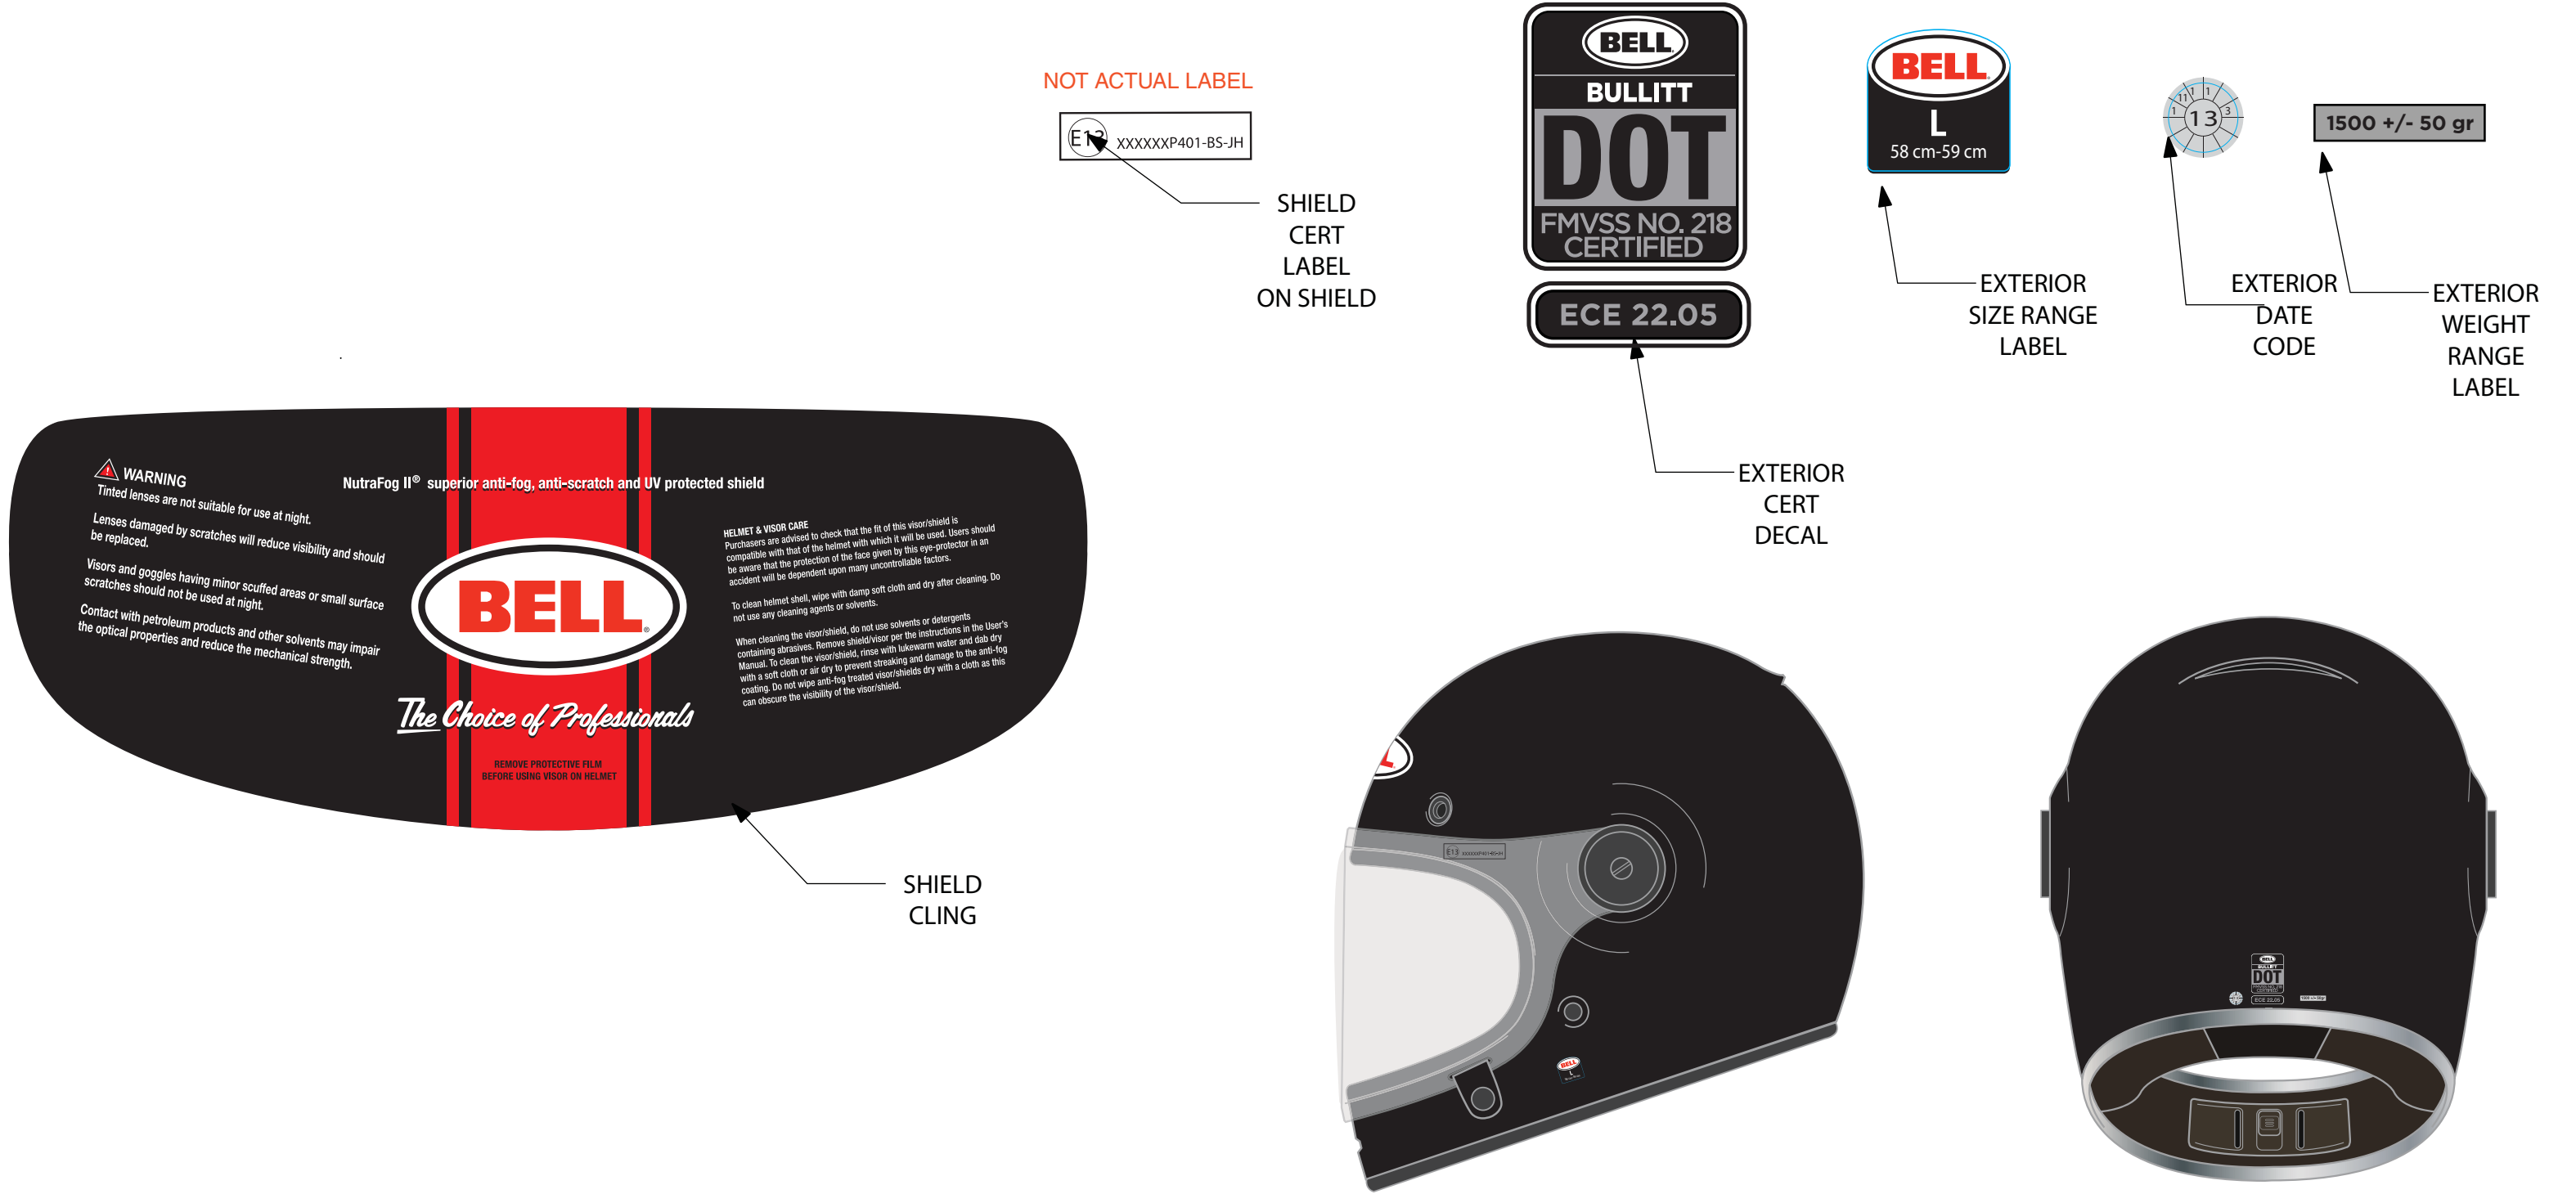

EASTON-BELL SPORTS 2200 Scotts Valley Drive, Scotts Valley, California 95060 – 831.461.7500 – FAX: 831.461.7503 				Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to produce, disclose its contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.				Unless otherwise specified, dimensions are in millimeters. Tolerances are: <table><thead><tr><th></th><th>DECIMALS</th><th>MM</th><th>IN.</th><th>ANGLES</th></tr></thead><tbody><tr><td>X</td><td>= ± 3.0</td><td>± 0.12</td><td></td><td rowspan="3">±1°</td></tr><tr><td>X.X</td><td>= ± 1.0</td><td>± 0.04</td><td></td></tr><tr><td>X.XX</td><td>= ± 0.25</td><td>± 0.01</td><td></td></tr><tr><td>X.XXX</td><td>= ± 0.13</td><td>± 0.005</td><td></td><td></td></tr></tbody></table>					DECIMALS	MM	IN.	ANGLES	X	= ± 3.0	± 0.12		±1°	X.X	= ± 1.0	± 0.04		X.XX	= ± 0.25	± 0.01		X.XXX	= ± 0.13	± 0.005			HELMET AND GRAPHIC HELMET SPECS BULLITT				PART NO. P401 DWG. SIZE 07-Aug-14 B SCALE: N/A CAD FILE: ILLUSTRATOR SHEET: 1 OF 1			
	DECIMALS	MM	IN.	ANGLES																																						
X	= ± 3.0	± 0.12		±1°																																						
X.X	= ± 1.0	± 0.04																																								
X.XX	= ± 0.25	± 0.01																																								
X.XXX	= ± 0.13	± 0.005																																								

12

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	9/5/2013

INTERIOR WOVEN WARNING LABEL MULTI LANGUAGE



DATE: _____

WARNING!

VEHICLE USER'S HELMET

No helmet can protect the wearer against all possible or foreseeable impacts.

1) For maximum protection this helmet must be of good fit and all retention straps must be securely fastened to retain the helmet. The helmet when fitted and fastened shall not be removed easily under this condition. 2) This helmet is so constructed that the energy of an impact may be absorbed through it's partial destruction, though damage may not be visible. If it suffers such an impact, it must either be returned to the manufacturer for inspection or be destroyed and replaced. 3) Make no modification. To maintain the full efficiency of this helmet there shall be no alteration to the structure of the helmet or its component parts. 4) Helmet can be seriously damaged by some common substances such as gasoline, paint, adhesives or cleaning agents without damage being visible to user. Apply only the following: Non-abrasive cleaners to the shell, only mild soap and water to fitpads and liner. 5) Certified as a full face helmet. 6) Shell constructed of composite material and polyester resin. Liner of expanded polystyrene.

BELL HELMETS

MADE IN CHINA

Warning! Read owner's manual. To get a replacement manual call Bell at 800-456-Bell.

SIZES













COMPATIBLE VISORS

☐ P157-CS-FS
☐ P157-RS-JH
☐ P311-CS-JH
☐ BH-IS-SS

☐ P157-SS-LY
☐ P157-CS-JH
☐ P362-IS-WS

☐ P401-B5-JH
☐ P401-F5-JH
☐ P311-IS-JH



DATE: _____

CASQUE POUR UTILISATEUR DE VÉHICULE

AVERTISSEMENT !

Aucun casque n'est capable de protéger celui qui le porte de tous les impacts possibles ou prévisibles.

1) Pour obtenir le maximum de protection de ce casque, il doit être de la bonne taille et toutes les courroies d'attache doivent être bien fermées pour maintenir le casque en place. Une fois que le casque convient bien et qu'il est bien positionné et fixé par ses courroies, il ne sera pas facilement enlevé dans cette condition. 2) Ce casque est construit de telle manière que la force d'un impact puisse être absorbée par sa destruction partielle, même si les dommages n'en sont pas visibles. Si un casque fait l'objet d'un tel impact, il doit être soit renvoyé au fabricant pour être inspecté, soit être détruit et remplacé. 3) N'y apporter aucune modification. Pour conserver l'efficacité complète de ce casque, aucune modification de sa structure ni des pièces la composant ne doit être effectuée. 4) Le casque pourrait être gravement endommagé par des substances ordinaires telles que l'essence, la peinture, les colles ou détergents, sans toutefois que les dommages ne soient visibles à l'utilisateur. Utiliser seulement ce qui suit : Produits nettoyants non-abrasifs pour la coque extérieure du casque, seulement du savon doux et de l'eau pour les coussinets de confort et de fixation et pour le revêtement intérieur du casque. 5) Certifié comme casque recouvrant toute la tête. 6) Coque extérieure construite de matériaux composites et de résine polyester. Revêtement intérieur en polystyrène expansé.

BELL HELMETS
FABRIQUÉS EN CHINE

Avertissement ! Lire le Guide de l'utilisateur.

Pour le placement de ce guide, contacter Bell au 800-456-Bell.

XS

54-55 cm

S

55-56 cm

M

57-58 cm

L

58-59 cm

XL

60-61 cm

XXL


62-63 cm

COMPATIBLE VISIÈRE



☐ P157-CS-FS
 ☐ P157-RS-JH
 ☐ P311-CS-JH
 ☐ BH-IS-SS

☐ P157-SS-LY
 ☐ P157-CS-JH
 ☐ P362-IS-WS

☐ P401-B5-JH
 ☐ P401-FS-JH
 ☐ P311-IS-JH

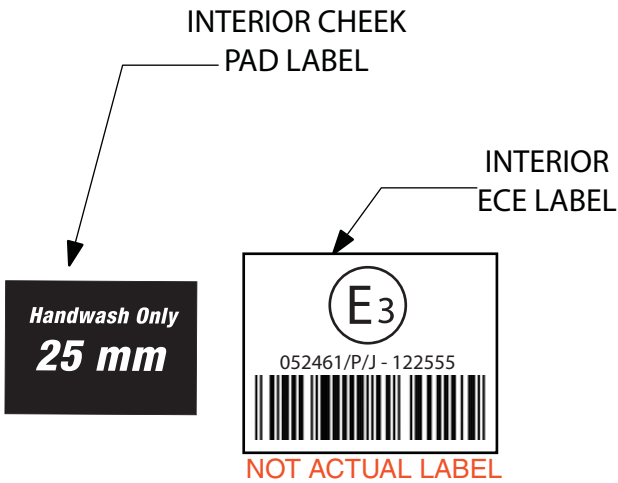


INTERIOR EPS LABELS



RED
LEATHER
CHIN PULL



EASTON-BELL SPORTS 2200 Scotts Valley Drive, Scotts Valley, California 95060 – 831.461.7500 – FAX: 831.461.7503 		Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to produce, disclose its contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.		Unless otherwise specified, dimensions are in millimeters. Tolerances are:		<table border="1"> <thead> <tr> <th>DECIMALS</th> <th>MM</th> <th>IN.</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>= ± 3.0</td> <td>± 0.12</td> <td rowspan="3">± 1°</td> </tr> <tr> <td>X.X</td> <td>= ± 1.0</td> <td>± 0.04</td> </tr> <tr> <td>X.XX</td> <td>= ± 0.25</td> <td>± 0.01</td> </tr> <tr> <td>X.XXX</td> <td>= ± 0.13</td> <td>± 0.005</td> <td></td> </tr> </tbody> </table>	DECIMALS	MM	IN.	ANGLES	X	= ± 3.0	± 0.12	± 1°	X.X	= ± 1.0	± 0.04	X.XX	= ± 0.25	± 0.01	X.XXX	= ± 0.13	± 0.005		HELMET AND GRAPHIC HELMET SPECS BULLITT		PART NO. P401		DWG. SIZE B
DECIMALS	MM	IN.	ANGLES																										
X	= ± 3.0	± 0.12	± 1°																										
X.X	= ± 1.0	± 0.04																											
X.XX	= ± 0.25	± 0.01																											
X.XXX	= ± 0.13	± 0.005																											
						SCALE: N/A		CAD FILE: ILLUSTRATOR	SHEET: 1 OF 1																				



BULLITT
PACKAGING

13

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	9/5/2013

MULTI LANGUAGE OWNERS MANUAL




BELL STICKER - INCLUDED IN BOX




BULLITT STICKER - INCLUDED IN BOX

BULLITT



SHELL DIMENSIONS

7

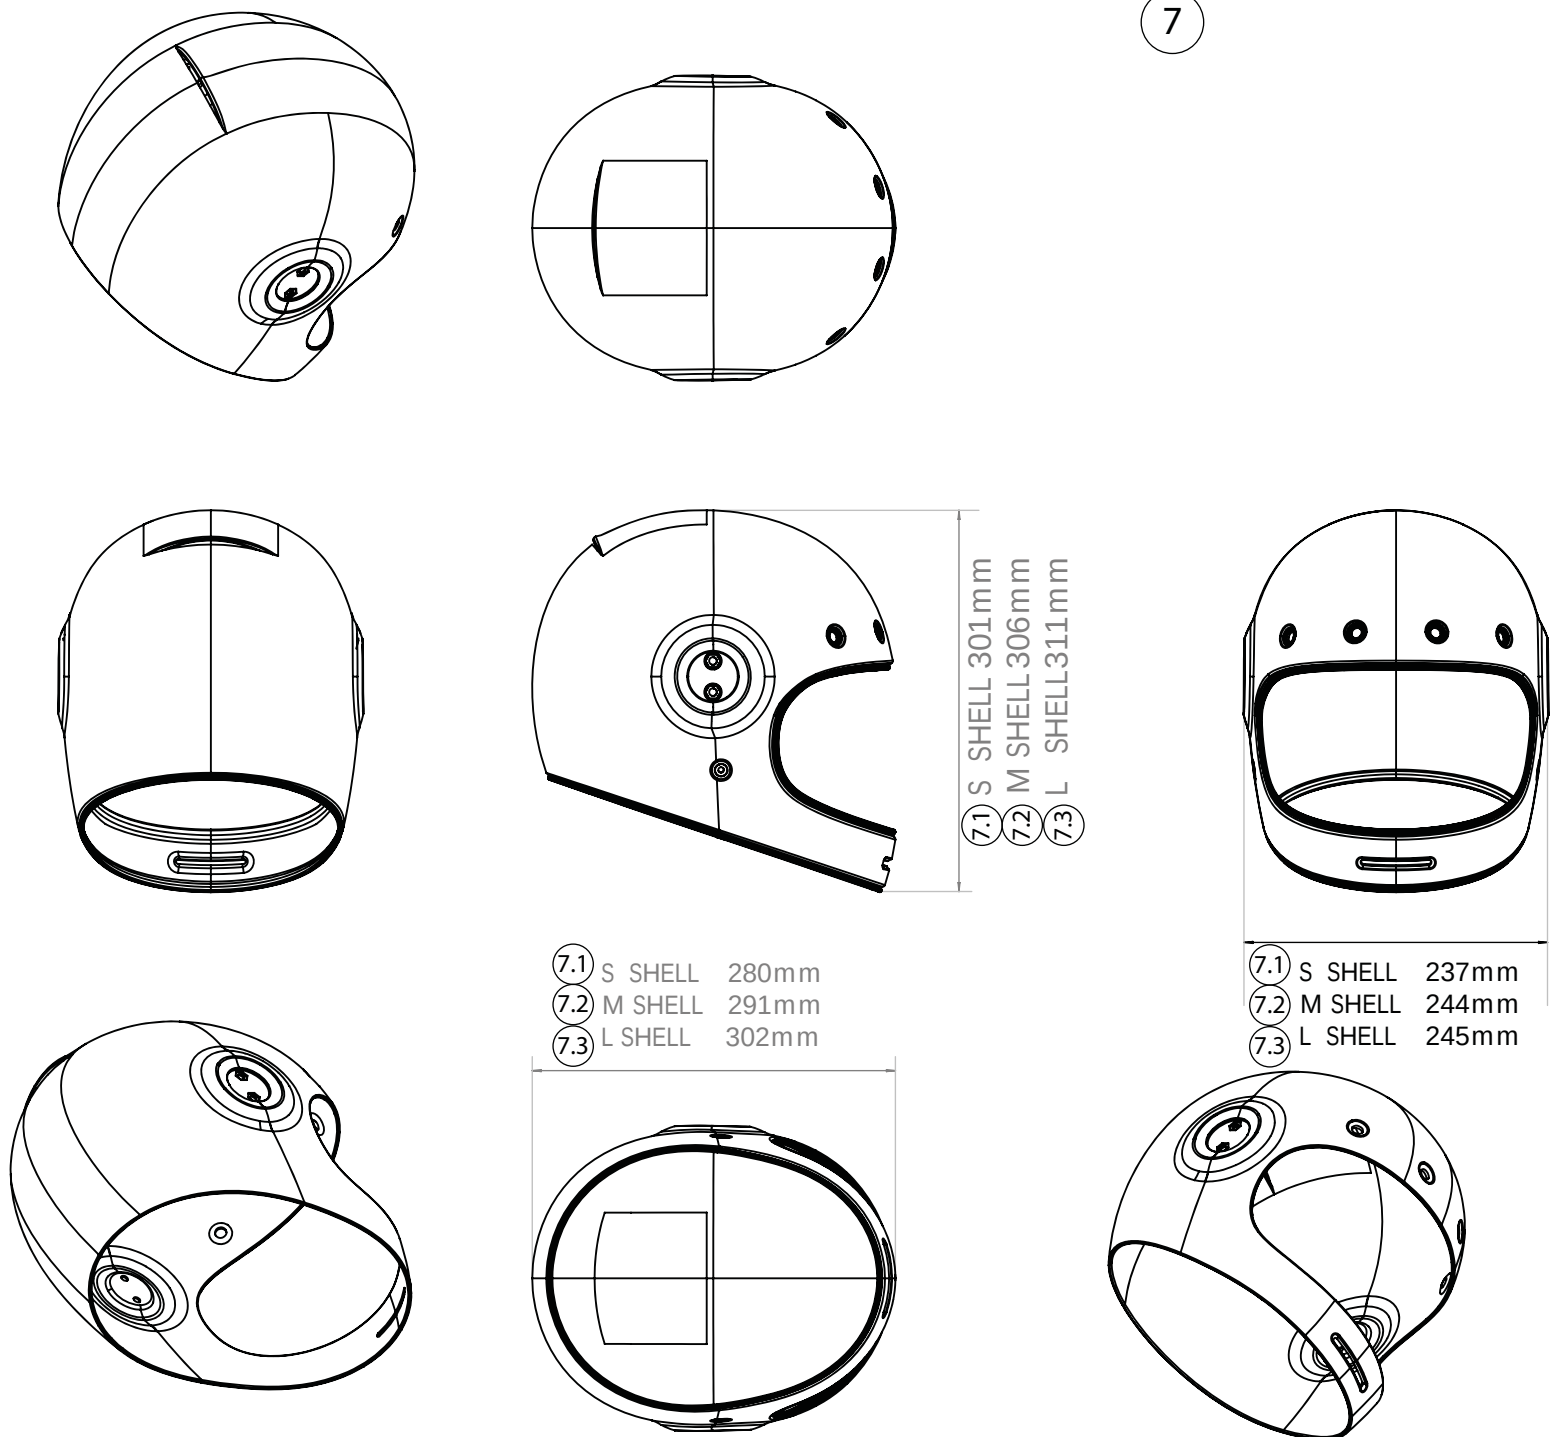

- 7.1 S SHELL 280mm
- 7.2 M SHELL 291mm
- 7.3 L SHELL 302mm

- 7.1 S SHELL 237mm
- 7.2 M SHELL 244mm
- 7.3 L SHELL 245mm

- 7.1 S SHELL 301mm
- 7.2 M SHELL 306mm
- 7.3 L SHELL 311mm

8

EPS-SHELL-CONFIGURATION					
BULLITT	MARKET SIZE/CM		EPS SIZE		SHELL SIZE
	XS	54-55 CM	SM		
	SM	55-56 CM			
	MD	57-58 CM	MD		
	LG	58-59 CM			
	XL	60-61 CM	LG		
	XXL	62-63 CM			

TOOL ID	Standard	SIZE	RAW COLOR	Average Volume (ml)	Weight (g)+/-
P401-S	DOT/ECE/AS	S	NATURAL	TBD	480
P401-M	DOT/ECE/AS	M	NATURAL	TBD	516
P401-L	DOT/ECE/AS	L	NATURAL	TBD	663

- NOTES:
- 1. SHELL MATERIAL: FIBERGLASS COMPOSITE
COLOR: NATURAL
 - 2. SHELL WEIGHTS ARE RAW TRIMMED SHELLS READY FOR PAINT
 - 3. MATERIAL CANNOT CHANGED WITHOUT APPROVAL FROM EASTON BELL

Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

PRODUCT LINE

POWERSPORTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

DECIMALS	MM	IN.	ANGLES
X	= ± 3.0	± 0.12	± 1°
X.X	= ± 1.0	± 0.04	
X.XX	= ± 0.25	± 0.01	
X.XXX	= ± 0.13	± 0.005	

BELL SPORTS, INC.



380 ENCINAL STREET
SANTA CRUZ, CALIFORNIA 95060
831.420.4000 FAX: 831.457.4444

TITLE:

SHELL, FIBERGLASS SPECS, P401

DWG. SIZE: **B** PART NO. **TABLE**


SCALE: 1 : 1 CAD FILE: ILLUSTRATOR SHEET: 1 OF 1

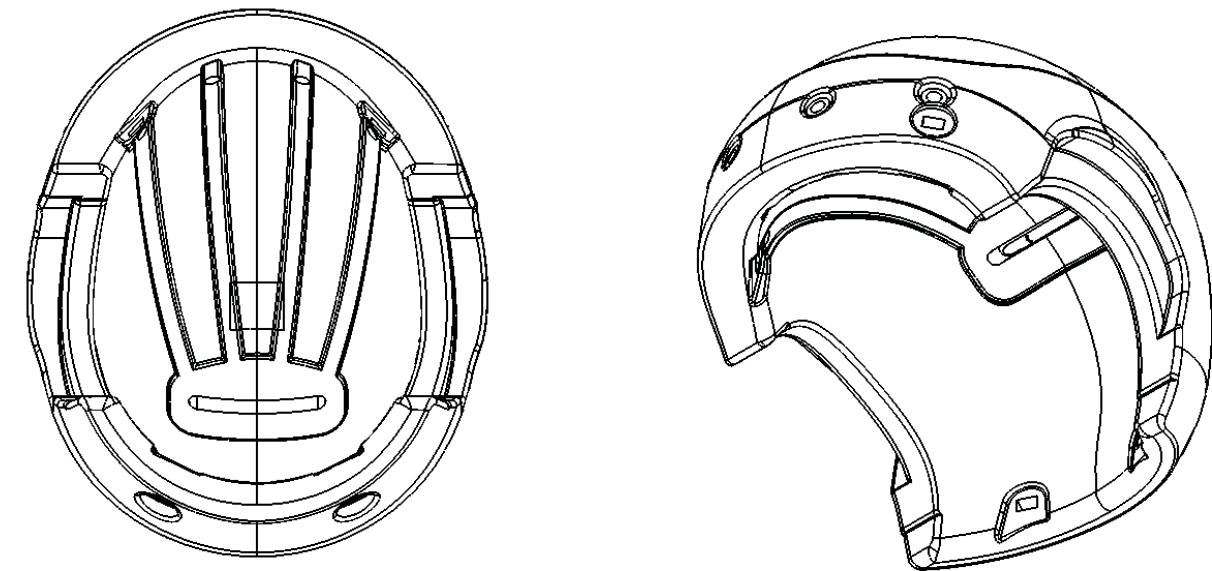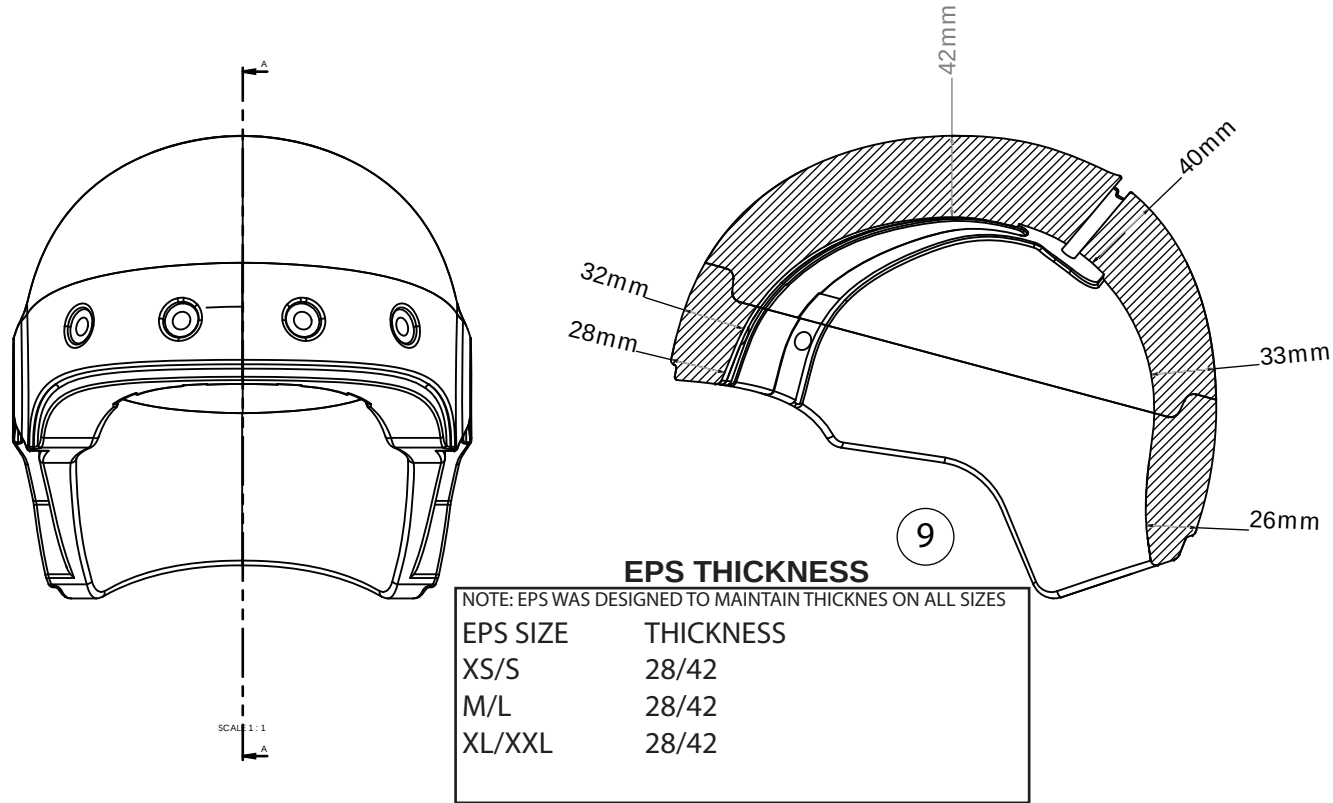


NOTES:

1. FOAM MATERIAL: Loyal Group
GRADE: C-MS: 1.0 - 1.6 mm particle size and 15 - 17 g/l foam density
COLOR: WHITE (PAINTED BLACK)
2. P and MAIN EPS ARE HELD TOGETHER WITH GLUE

REVISION					
REV	ECO	DESCRIPTION	CHECKED	BY	DT-MO-YR
2	EP-xxxxx	INITIAL RELEASE	NAME	NAME	19NOV13

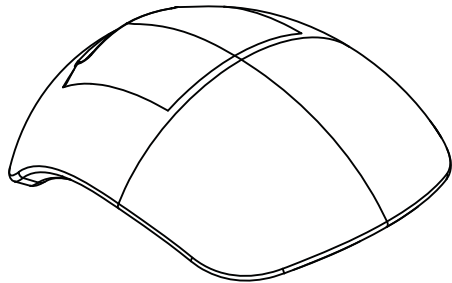

TOOL ID (P Area)	Standard	#Cavity	EPS COLOR	Average Volume (ml)	Density (g/l)	Target Weight (g)	Min. Weight (g)	Max. Weight (g)
P401-S	DOT/ECE/AS	1	WHITE	TBD	20g/l	23g	21	25
P401-M	DOT/ECE/AS	1	WHITE	TBD	20g/l	24g	22	26
P401-XL	DOT/ECE/AS	1	WHITE	TBD	20g/l	26g	24	28

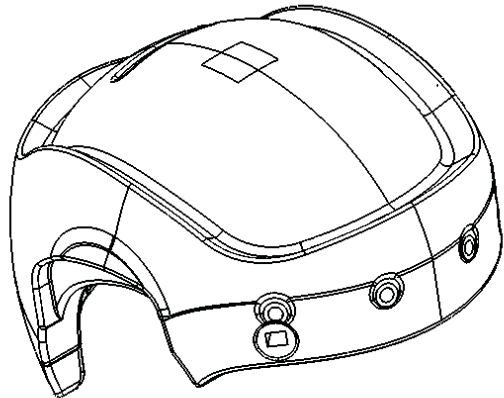

TOOL ID (Main Area)	Standard	#Cavity	EPS COLOR	Average Volume (ml)	Density (g/l)	Target Weight (g)	Min. Weight (g)	Max. Weight (g)
P401-S-1	DOT/ECE/AS	1	WHITE	TBD	45g/l	74g	69	79
P401-M-1	DOT/ECE/AS	1	WHITE	TBD	40g/l	100g	95	105
P401-XL-1	DOT/ECE/AS	1	WHITE	TBD	45g/l	110g	105	115

Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

PRODUCT LINE

POWERSPORTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

DECIMALS	MM	IN.	ANGLES
X	= ± 3.0	± 0.12	± 1°
X.X	= ± 1.0	± 0.04	
X.XX	= ± 0.25	± 0.01	
X.XXX	= ± 0.13	± 0.005	

BELL SPORTS, INC.

380 ENCINAL STREET
SANTA CRUZ, CALIFORNIA 95060
831.420.4000 FAX: 831.457.4444

BELL

TITLE:

EPS LINER, P401

DWG. SIZE: **B** PART NO.


TABLE

SCALE: 1 : 1

CAD FILE: ILLUSTRATOR

SHEET: 1 OF 1

REVISION					
REV	ECO	DESCRIPTION	CHECKED	BY	DT-MO-YR
2	EP-xxxxx	INITIAL RELEASE	NAME	NAME	119NOV13

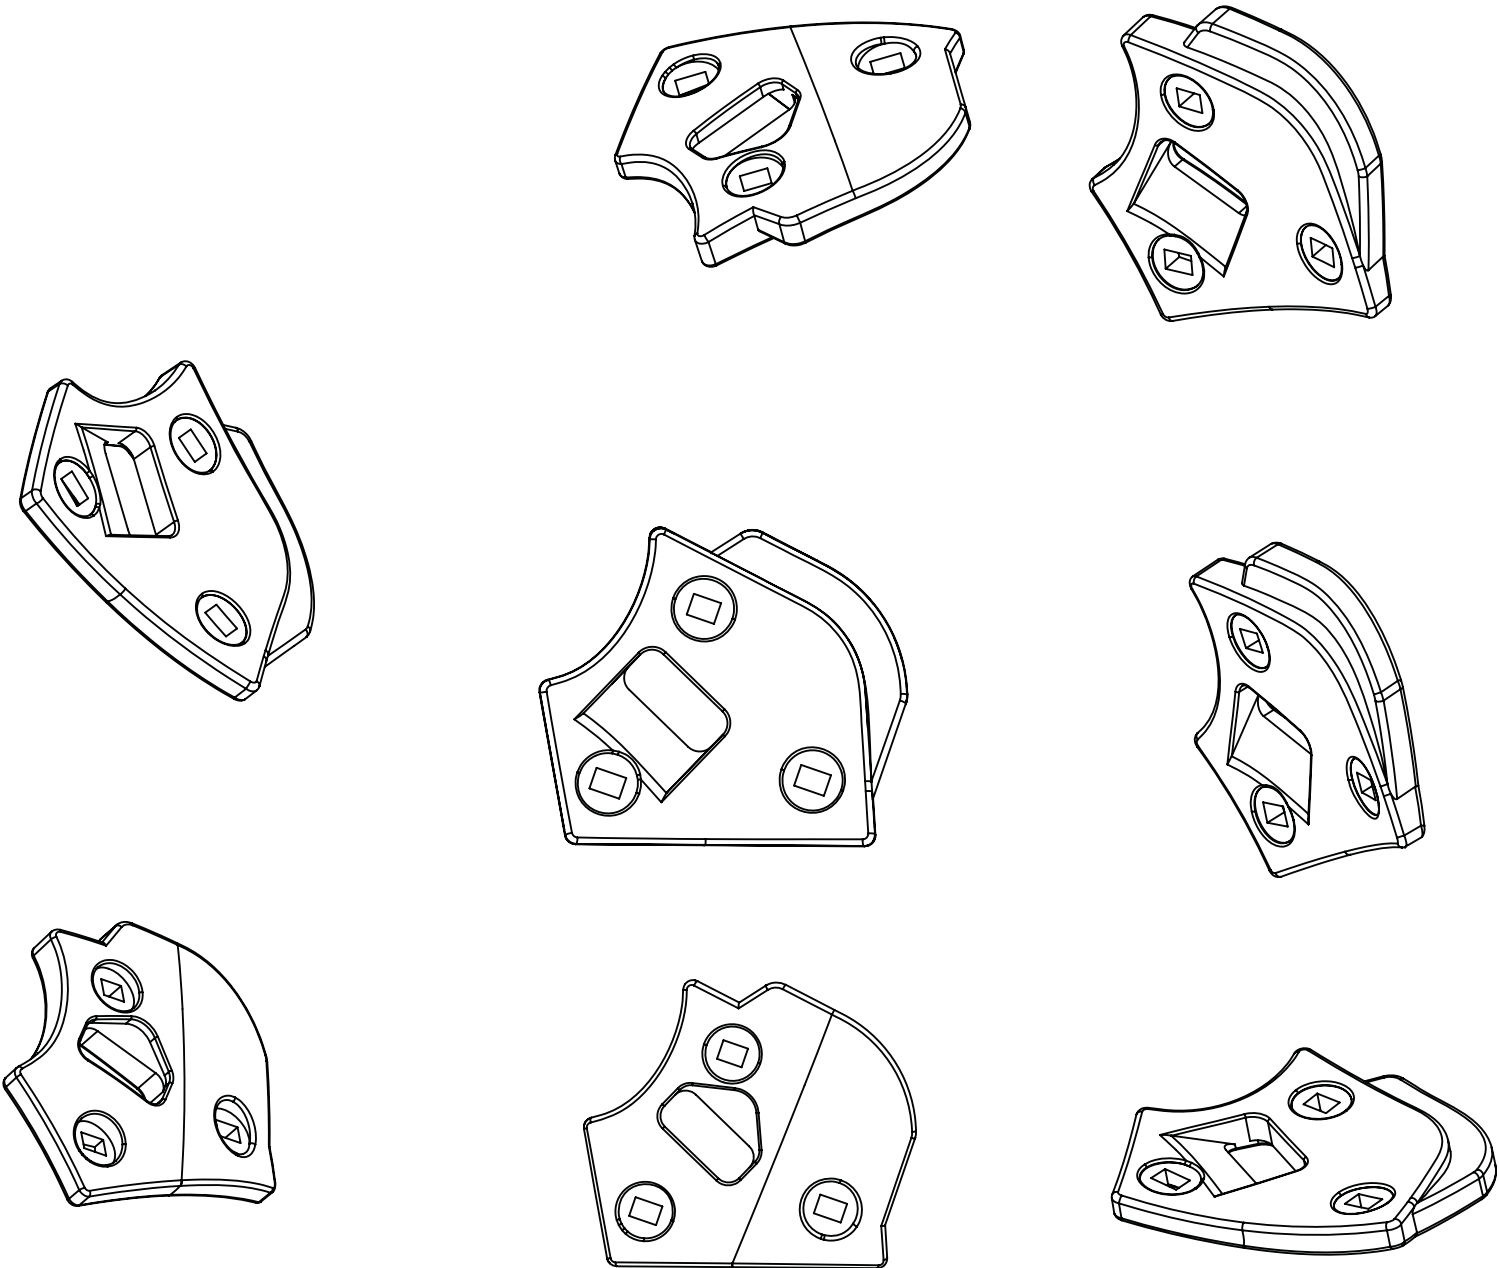

- NOTES:
- 1. FOAM MATERIAL: Loyal Group King Pearl EPS
GRADE: C-MS: 1.0 - 1.6 mm particle size and 15 - 17 g/l foam density
COLOR: WHITE (PAINTED BLACK)
 - 2. FLASH ON MOLDED PART NOT TO EXCEED 0.25 mm

TOOL ID PROJECT #1-SIZE RANGE--CAVITY#	Standard	#CAVITY	EPS COLOR	Average Volume (ml)	Density (g/l)	Target Weight (g)	Min. Weight (g)	Max. Weight (g)
P401-M-1	DOT/ECE/AS	1	WHITE	TBD	70	21	19	23
P401-XL-1	DOT/ECE/AS	1	WHITE	TBD	70	22	20	24
	DOT/ECE/AS	1	WHITE	TBD	70	21	19	23

Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

PRODUCT LINE

POWERSPORTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

DECIMALS	MM	IN.	ANGLES
X	= ± 3.0	± 0.12	±1°
X.X	= ± 1.0	± 0.04	
X.XX	= ± 0.25	± 0.01	
X.XXX	= ± 0.13	± 0.005	

BELL SPORTS, INC.









380 ENCINAL STREET
SANTA CRUZ, CALIFORNIA 95060
831.420.4000 FAX: 831.457.4444

TITLE:

EPS CHINBAR RIGHT, P401

DWG. SIZE	PART NO.
B	TABLE

SCALE:	1 : 1	CAD FILE:	ILLUSTRATOR	SHEET:	1 OF 1
--------	-------	-----------	-------------	--------	--------

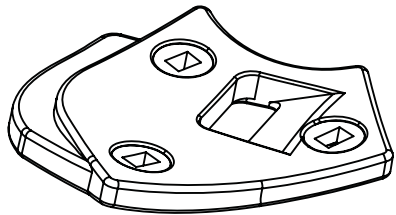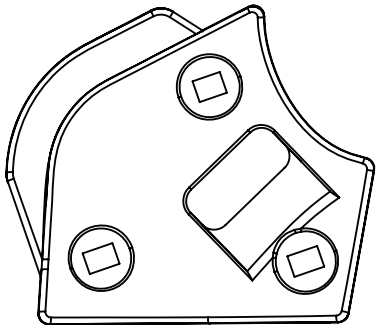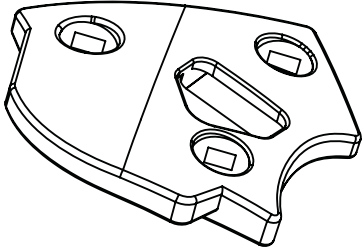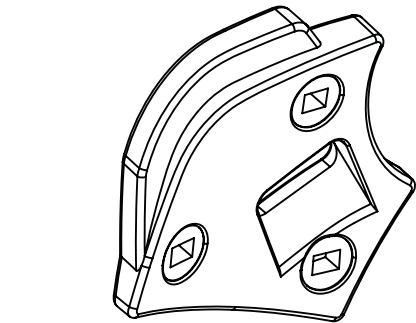

REVISION					
REV	ECO	DESCRIPTION	CHECKED	BY	DT-MO-YR
2	EP-xxxxx	INITIAL RELEASE	NAME	NAME	119NOV13

NOTES:

1. FOAM MATERIAL: Loyal Group King Pearl EPS
GRADE: C-MS: 1.0 - 1.6 mm particle size and 15 - 17 g/l foam density
COLOR: WHITE (PAINTED BLACK)
2. FLASH ON MOLDED PART NOT TO EXCEED 0.25 mm

TOOL ID	Standard	#CAVITY	EPS COLOR	Average Volume (ml)	Density (g/l)	Target Weight (g)	Min. Weight (g)	Max. Weight (g)
PROJECT #1-SIZE RANGE -CAVITY#								
P401-M-1	DOT/ECE/AS	1	WHITE	TBD	70	21	19	23
P401-XL-1	DOT/ECE/AS	1	WHITE	TBD	70	22	20	24
	DOT/ECE/AS	1	WHITE	TBD	70	21	19	23

Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

PRODUCT LINE

POWERSPORTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:

DECIMALS	MM	IN.	ANGLES
X	= ± 3.0	± 0.12	±1°
X.X	= ± 1.0	± 0.04	
X.XX	= ± 0.25	± 0.01	
X.XXX	= ± 0.13	± 0.005	

BELL SPORTS, INC.

380 ENCINAL STREET
SANTA CRUZ, CALIFORNIA 95060
831.420.4000 FAX: 831.457.4444






TITLE:

EPS CHINBAR LEFT, P401

DWG. SIZE	PART NO.
B	TABLE

SCALE:	1 : 1	CAD FILE:	ILLUSTRATOR	SHEET:	1 OF 1
--------	-------	-----------	-------------	--------	--------

REVISION					
REV	ECO	DESCRIPTION	CHECKED	BY	DT-MO-YR
2	EP-xxxxx	INITIAL RELEASE	NAME	NAME	119NOV13

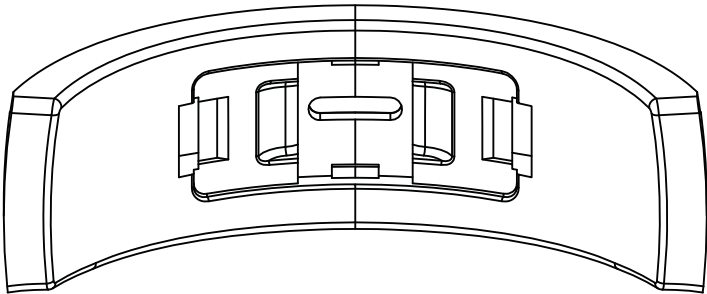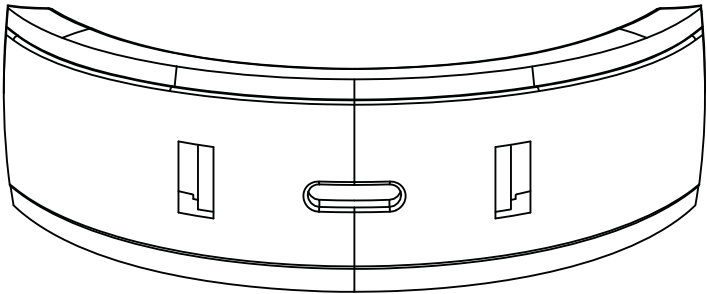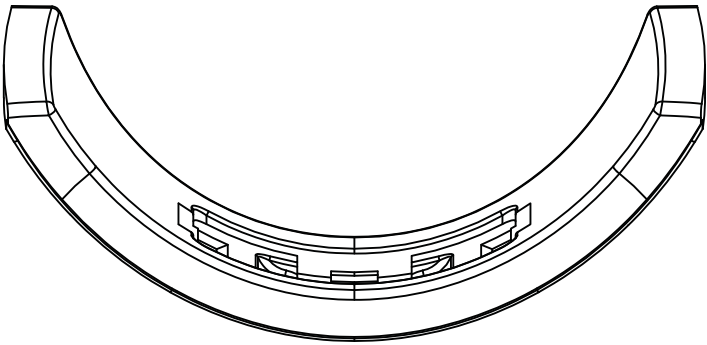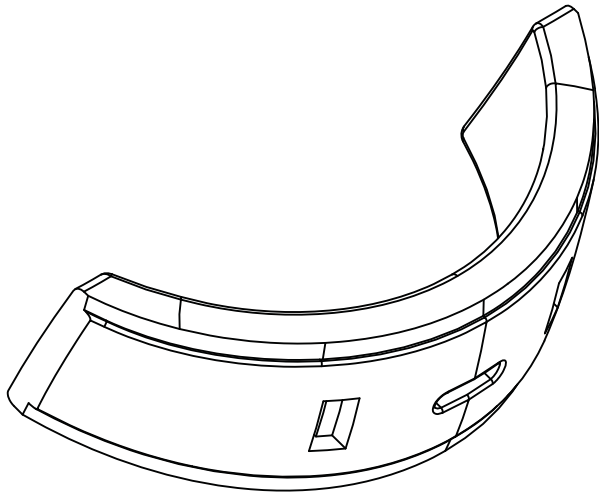

- NOTES:
- FOAM MATERIAL: Loyal Group King Pearl EPS
GRADE: C-SB: 0.6 - 0.9 mm particle size and 19 - 24 g/l foam density
COLOR: WHITE (PAINTED BLACK)
 - FLASH ON MOLDED PART NOT TO EXCEED 0.25 mm

TOOL ID	Standard	#CAVITY	EPS COLOR	Average Volume (ml)	Density (g/l)	Target Weight (g)	Min. Weight (g)	Max. Weight (g)
NA	DOT/ECE/AS	1	WHITE	TBD	75	8	6	10
	DOT/ECE/AS	1	WHITE	TBD	75	8	6	10
	DOT/ECE/AS	1	WHITE	TBD	90	9	7	11

Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

PRODUCT LINE

POWERSPORTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ARE:

DECIMALS	MM	IN.	ANGLES
X	= ± 3.0	± 0.12	± 1°
X.X	= ± 1.0	± 0.04	
X.XX	= ± 0.25	± 0.01	
X.XXX	= ± 0.13	± 0.005	

BELL SPORTS, INC.

380 ENCINAL STREET
SANTA CRUZ, CALIFORNIA 95060
831.420.4000 FAX: 831.457.4444

TITLE:
EPS CHINBAR CENTER, P401

DWG. SIZE
B

PART NO.
TABLE

SCALE:
1 : 1

CAD FILE:
ILLUSTRATOR

SHEET:
1 OF 1

07-Aug-14

07-Aug-14

BULLITT
INTERIOR DETAILS

10

MESH WILL NOT BE SEWN DOWN
NEEDS OVER LOCK STITCH
ON EDGES

BACKSIDE
Base Top Pad
4mm Base Foam
(NO air mesh)

Base Top pad

Mid Top Pad

Inner Top Pad
(debossed BELL)

Measured Thickness 24mm

MESH
NEEDS OVER LOCK
STITCH

Crown Pad

MID TOP PAD
MICRO FIBER
NO HOLES

Neck Pad

pp
plate

15mm

10mm

Above shows how foam in neck roll is
stacked up

	Foam Type	XS(54-55)	Small(55-56)	Med (57-58)	Lrg(58-59)	XL(60-61)	XXL(62-63)
Top	40D/18D	BASE4mm / MID6mm / 0mm	BASE 4mm /MID 6mm / Inner 0MM	BASE 4mm /MID 6mm / Inner 0MM	4mm/6mm/0mm	4mm/6mm/0mm	4mm/6mm/0mm
Crown	25D	8mm	6mm	8mm	6mm	8mm	6mm
Neck Roll	25D	15mm/10mm	15mm/10mm	15mm/10mm	15mm/10mm	15mm/10mm	15mm/10mm

YC has 3 foam densities
40D density (Most Firm)
25D density (Firm)
18D density (Less Firm)

Micro Fiber is fabric with 6 or 8 glue to fabric
Leather no foam backing

ALL MODELS



MICRO FIBER FABRIC NOTES:

Top Pad: NO HOLES

Cheek Pad: WITH HOLES

Crown Pad: WITH HOLES

Neck Pad: WITH HOLES


LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	18SEP13



Material: Leather
Color: LIGHT BROWN or BLACK
YC SPEC:



Material: Leather
Color: DARK BROWN or BLACK
YC SPEC:



Material: MICRO FIBER PERFORATED
Color: LIGHT BROWN or BLACK
YC SPEC:



Material: MICRO FIBER
Color: LIGHT BROWN or BLACK
YC SPEC:




Material: SPACER MESH
Color: DARK BROWN or BLACK
YC SPEC: 3-layer Mesh



Material: MESH
Color: DARK BROWN or BLACK
YC SPEC:MESH MTC-046



Material: FISHING TAPE
Color: LIGHT BROWN or BLACK
YC SPEC:x




BULLITT
INTERIOR DETAILS

10

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	25SEP13



Cheek pad (+/- 3mm)						
final size Helmet	Stacked Foam Cheek		Measured			Size Label
	foam thickness	foam density	Dim A	Dim B	Dim C	
XS	3D Foam + 10mm	25D	16mm	40mm	35mm	Handsewn Only 35 mm
S	3D Foam + 5mm	25D	16mm	35mm	30mm	Handsewn Only 30 mm
M	3D Foam + 5mm	25D	16mm	35mm	30mm	Handsewn Only 30 mm
L	3D Foam	25D	16mm	30mm	25mm	Handsewn Only 25 mm
XL	3D Foam + 5mm	25D	16mm	35mm	30mm	Handsewn Only 30 mm
XXL	3D Foam	25D	16mm	30mm	25mm	Handsewn Only 25 mm

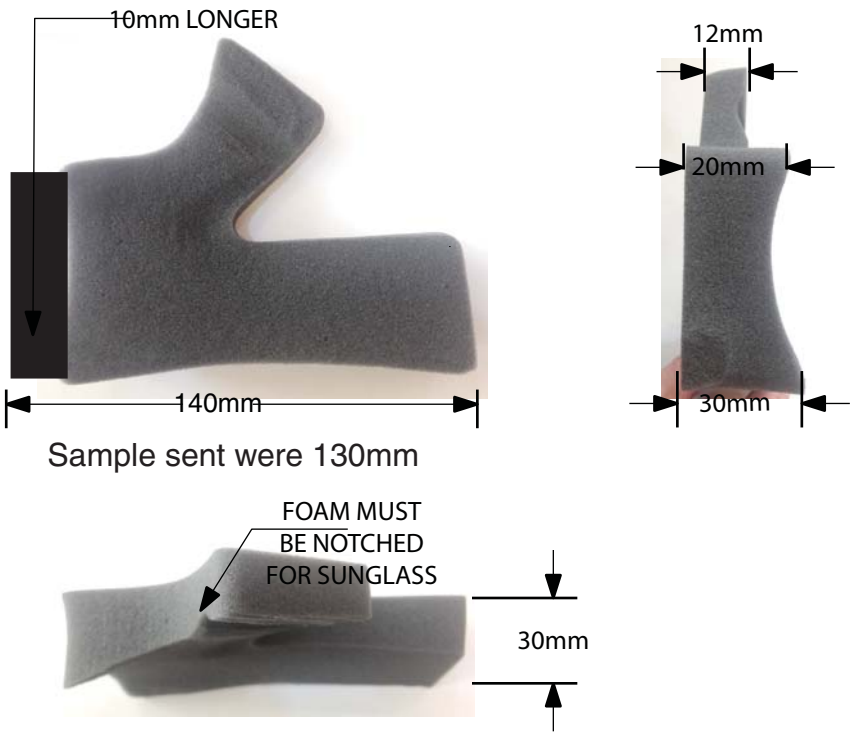

YC has 3 foam density
40D density (Firmest)
25D density (Firm)
15D density (Soft)

BULLITT
INTERIOR DETAILS

10


LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	25SEP13

NECK CUTAIN WILL BE FIXED TO HELMET SHELL

3 sizes




OUTSIDE VIEW

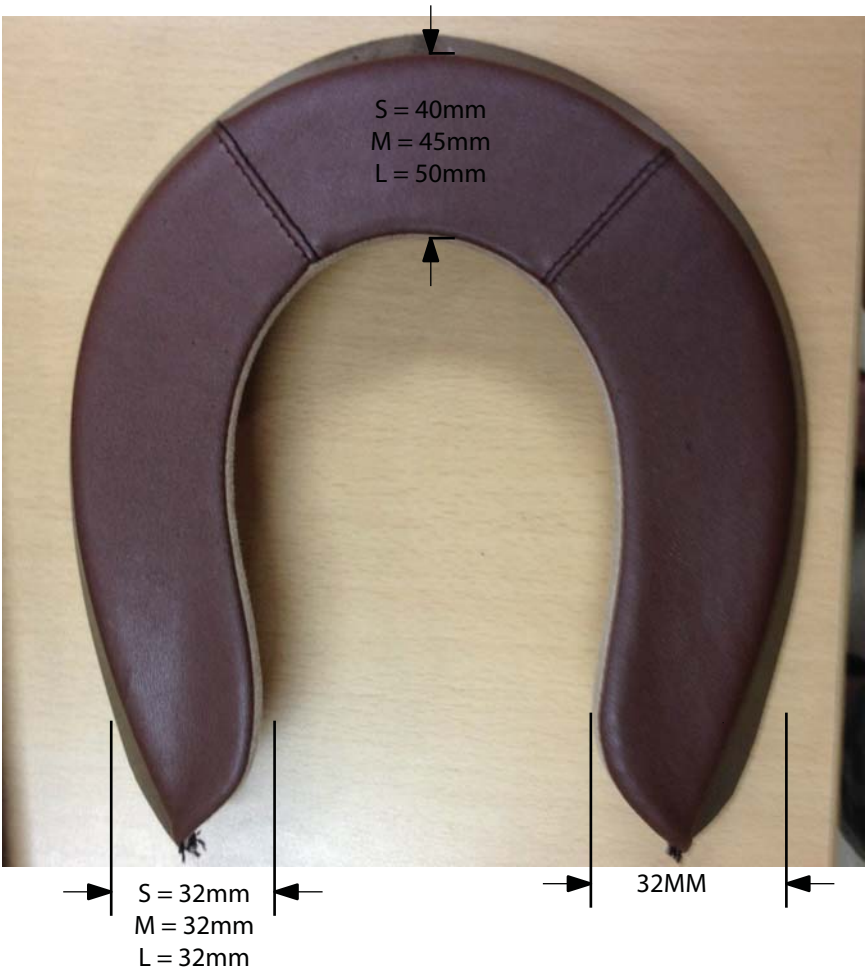

Neck Roll Should Be EVEN
With cheek Pads



GAP NO GOOD

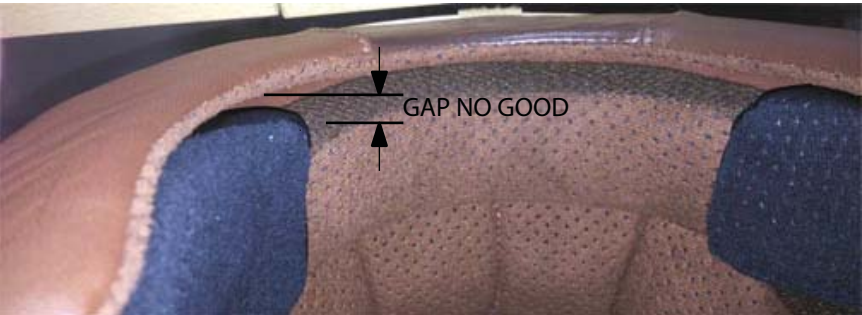

BULLITT

17

FLAT SHIELD SPECS

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

UNLESS OTHERWISE NOTED

1. THIS DRAWING CONTAINS CONTROL DIMENSIONS ONLY
FOR OUTER SURFACE GEOMETRY DEFINITION REFER TO IGES
FILE: FLAT_SHIELD_P401_2-0.IGES SUPPLIED CAD IS 100% OF FINAL
PART SIZE

2. MATERIAL: POLYCARBONATE

3. COLOR: CLEAR





4. VOLUME: 107.2 cm^3

COSMETIC SURFACES:

6. FLASH & MISMATCH NOT TO EXCEED 0.13mm

7. TEXT CONTENT: BELL
P401-FS-JH
EXCEEDS Z87.1/VESC-8
NOT WARRANTED SHATTERPROOF
IF TINTED, FOR DAY USE ONLY
MADE IN CHINA

8. DATE WHEEL SHOULD INCLUDE MONTH/YEAR DATA

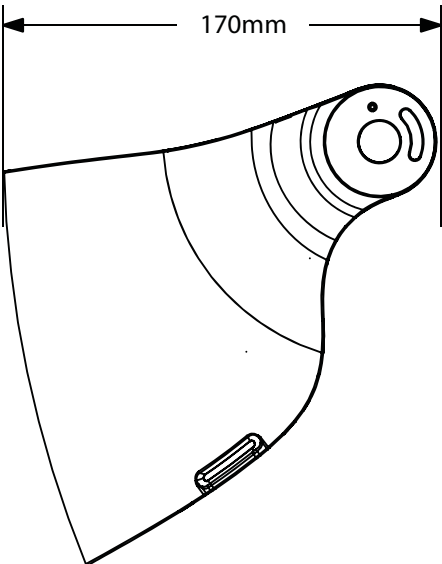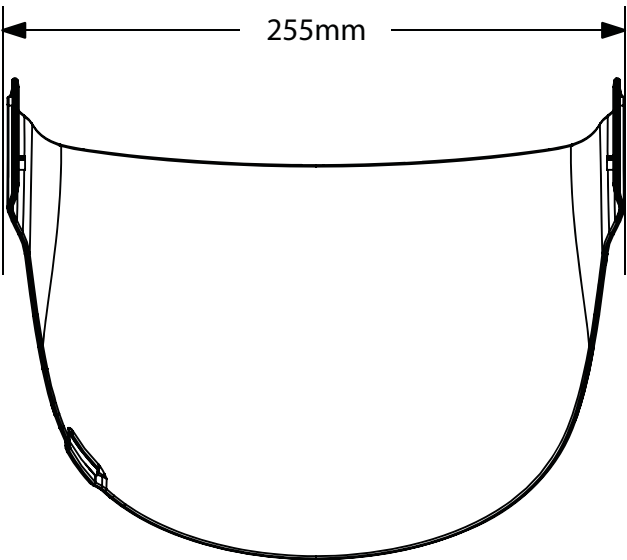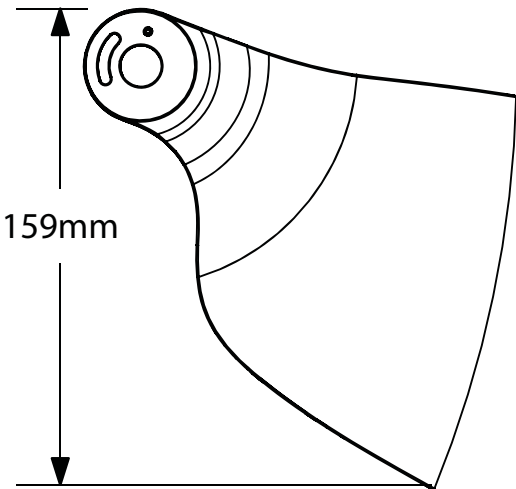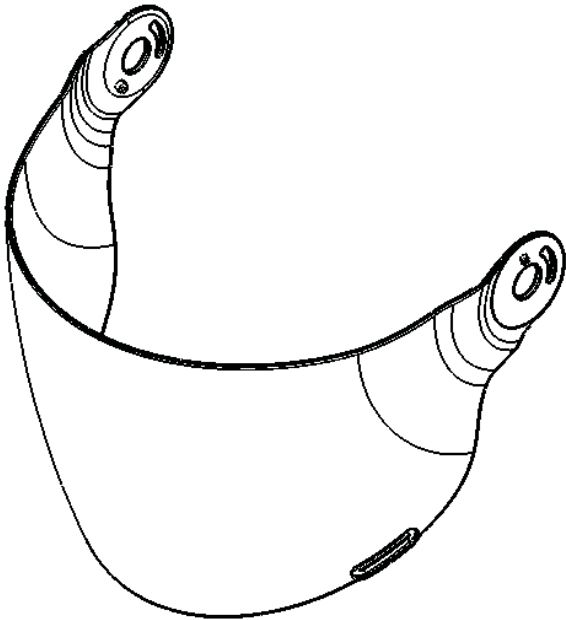


LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

BULLITT

17

FLAT SHIELD SPECS

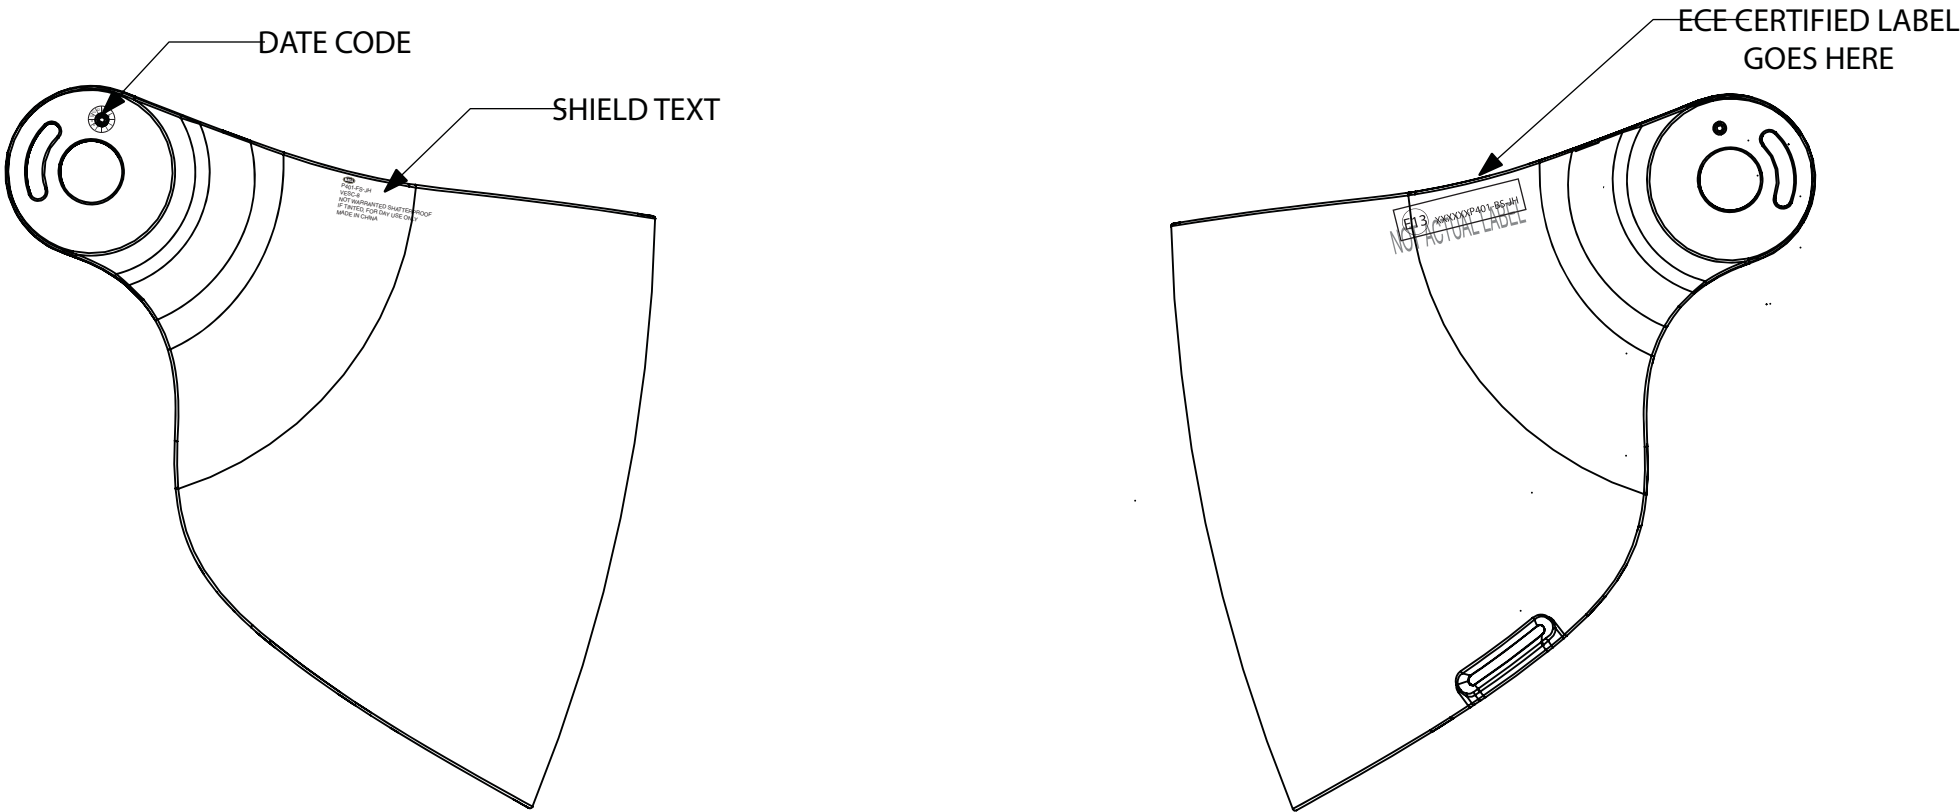

TYPE

- CS = CURVED SHIELD
- RS = RACE SHIED (tear off post)
- FS = FLAT SHIELD
- IS = INNER SHIELD
- BS = BUBBLE SHIELD
- R3 = RETRO 3-SNAP

VENDOR

- JH = JIN HUI
- FS = FORESIGHT
- WS = WANG SHI
- LY = Liang Yu
- LS = Lenti SRL

EASTON-BELL SPORTS

2200 Scotts Valley Drive, Scotts Valley, California 95060 – 831.461.7500 – FAX: 831.461.7503



Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to produce, disclose its contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

Unless otherwise specified, dimensions are in millimeters. Tolerances are:	DECIMALS	MM	IN.	ANGLES
	X	= ± 3.0	± 0.12	± 1°
	X.X	= ± 1.0	± 0.04	
	X.XX	= ± 0.25	± 0.01	
	X.XXX	= ± 0.13	± 0.005	

HELMET AND GRAPHIC

FLAT SHIELD SPECS


PART NO.	P401			DWG. SIZE	B
SCALE:	N/A	CAD FILE:	ILLUSTRATOR	SHEET:	1 OF 1

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

BULLITT

17

FLAT SHIELD SPECS

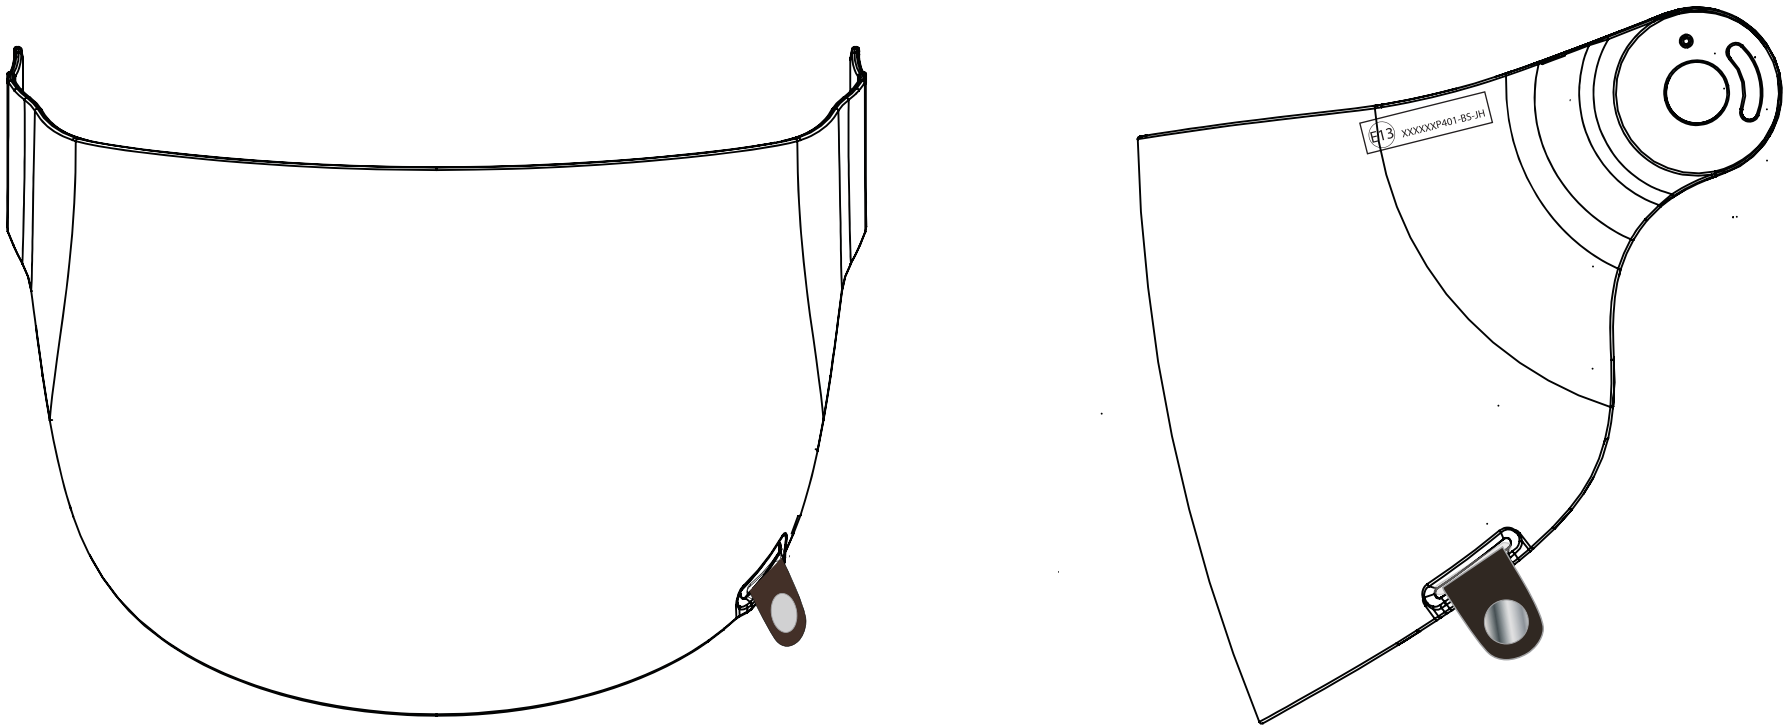

NOTES:

1. LEATHER PULL TAB ASSEMBLY MUST BE ATTACHED TO EACH SHIELD
2. ALL NON-IRIDIUM SHIELDS HAVE:

i. ANTI-FOG COATING ON INSIDE OF SHIELD (NOT CONSIDERED MIST RETARDANT)

ii. ANTI-SCRATCH COATING ON OUTSIDE OF SHIELD
3. ALL IRIDIUM SHIELDS HAVE:

i. ANTI-FOG COATING ON INSIDE OF SHIELD (NOT CONSIDERED MIST RETARDANT)

ITEM	MATERIAL	DESCRIPTION	QTY.
1	Leather	Leather Pull	1
2	Stainless Steel Cup	Steel Cup	1
3	Neodymium	Magnet	1
4	Zinc Plated Steel	Snap Post	1
5	Acrylic	3M Sticker Pad	1

BULLITT



17

BUBBLE SHIELD SPECS

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

UNLESS OTHERWISE NOTED

1. THIS DRAWING CONTAINS CONTROL DIMENSIONS ONLY
FOR OUTER SURFACE GEOMETRY DEFINITION REFER TO IGES
FILE: BUBBLE_SHIELD_P401_2-0.IGES SUPPLIED CAD IS 100% OF FINAL
PART SIZE
2. MATERIAL: POLYCARBONATE
3. COLOR: CLEAR
4. VOLUME: 111.9 cm^3
- COSMETIC SURFACES:
6. FLASH & MISMATCH NOT TO EXCEED 0.13mm
7. TEXT CONTENT: BELL
P401-BS-JH
EXCEEDS Z87.1/VESC-8
NOT WARRANTED SHATTERPROOF
IF TINTED, FOR DAY USE ONLY
MADE IN CHINA
8. DATE WHEEL SHOULD INCLUDE MONTH/YEAR DATA

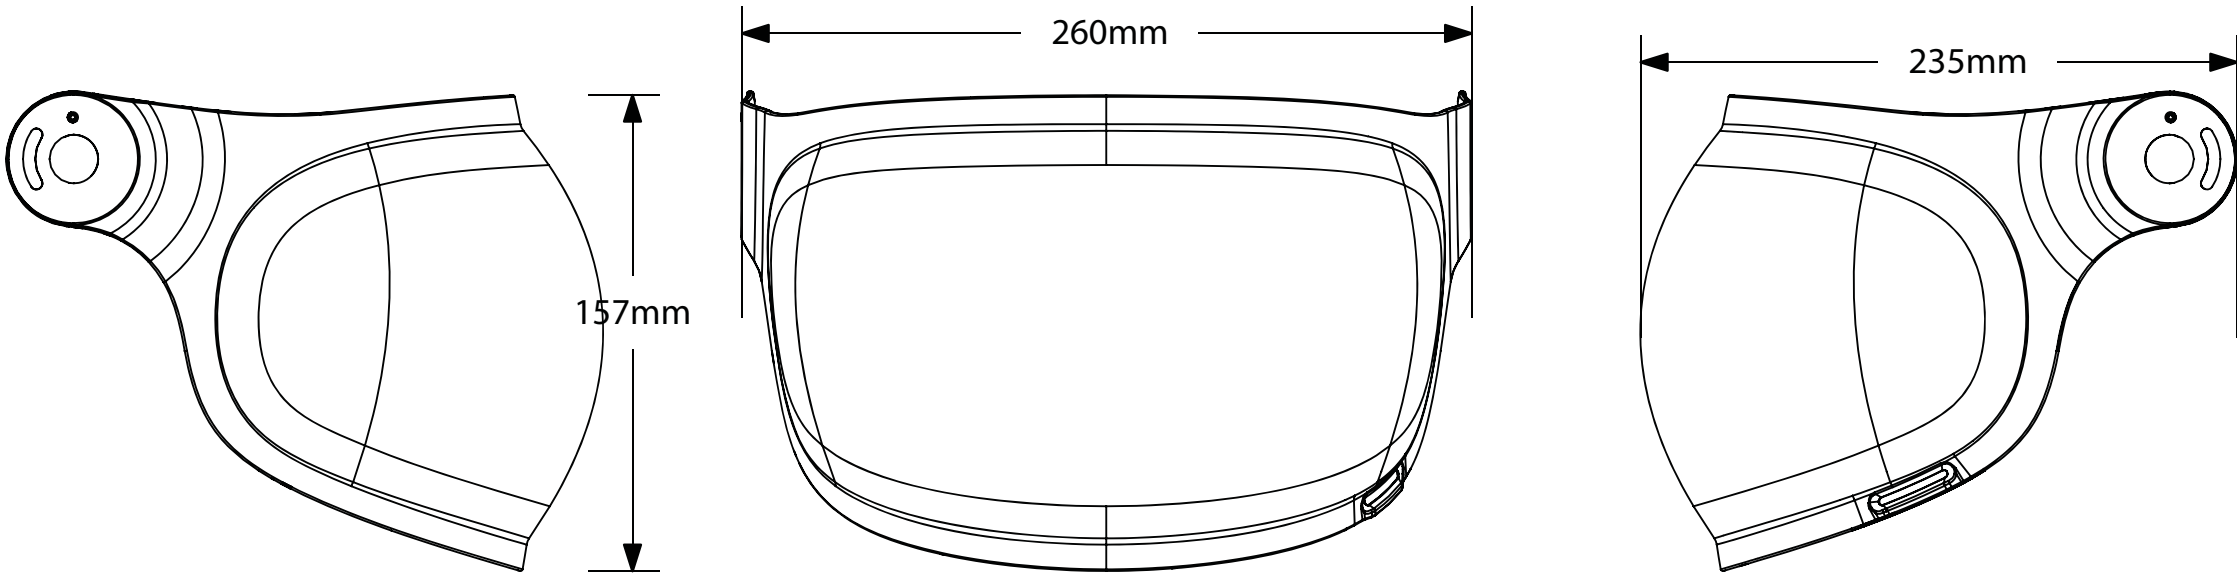
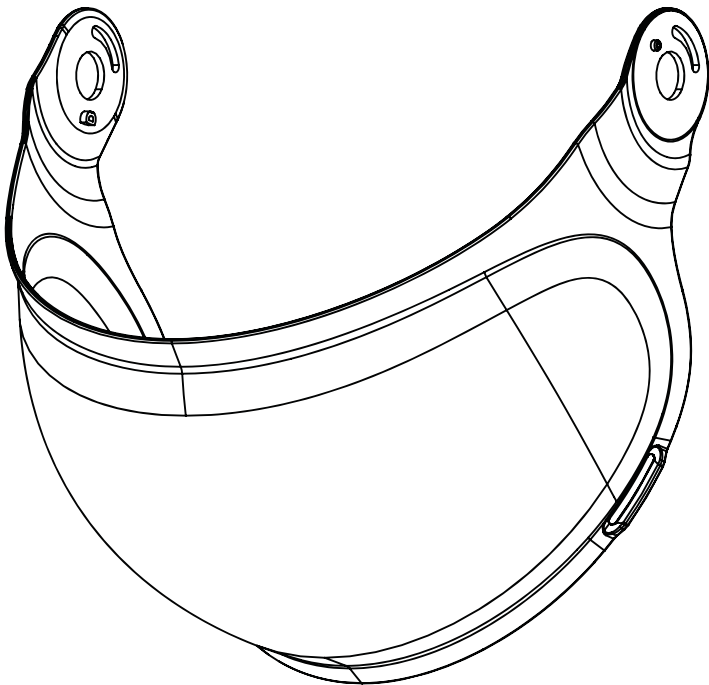


LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT:MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

BULLITT

17

BUBBLE SHIELD SPECS

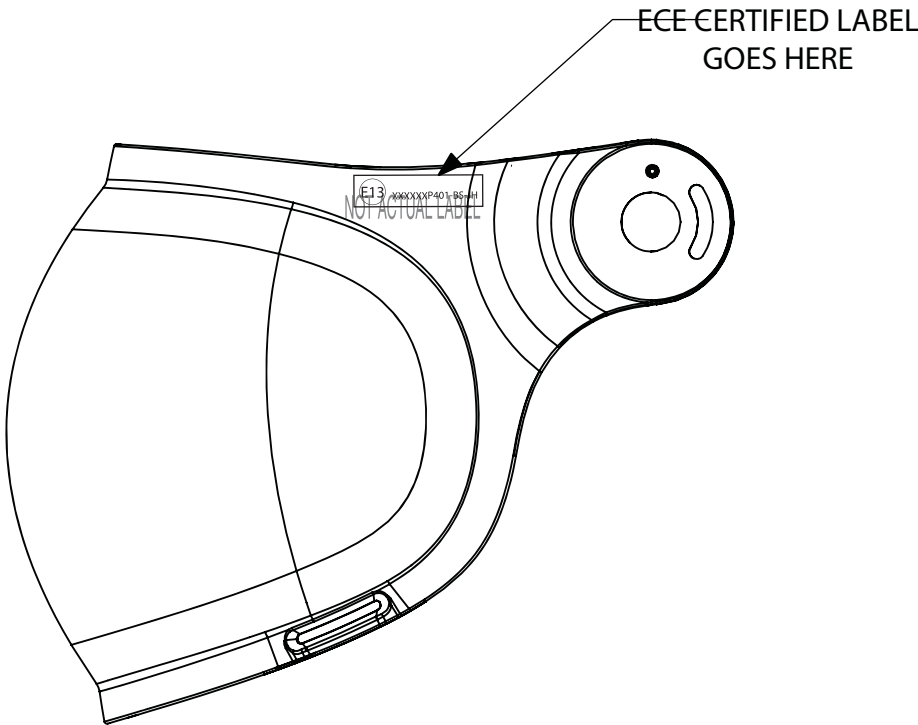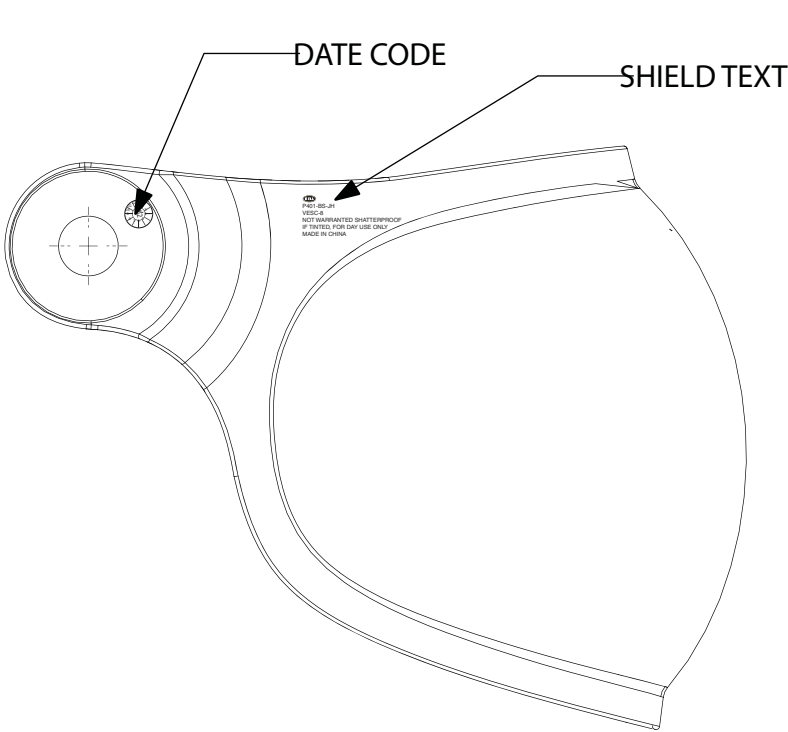

TYPE

- CS = CURVED SHIELD
- RS = RACE SHIED (tear off post)
- FS = FLAT SHIELD
- IS = INNER SHIELD
- BS = BUBBLE SHIELD
- R3 = RETRO 3-SNAP

VENDOR

- JH = JIN HUI
- FS = FORESIGHT
- WS = WANG SHI
- LY = Liang Yu
- LS = Lenti SRL

EASTON-BELL SPORTS

2200 Scotts Valley Drive, Scotts Valley, California 95060 – 831.461.7500 – FAX: 831.461.7503




Contains proprietary information belonging to Bell Sports, Inc. Its receipt or possession does not convey any rights to produce, disclose its contents, or to manufacture, use, or sell anything it may describe. Reproduction, disclosure, or use without specific written authorization is prohibited.

Unless otherwise specified, dimensions are in millimeters. Tolerances are:	DECIMALS	MM	IN.	ANGLES
	X	= ± 3.0	± 0.12	± 1°
	X.X	= ± 1.0	± 0.04	
	X.XX	= ± 0.25	± 0.01	
	X.XXX	= ± 0.13	± 0.005	

HELMET AND GRAPHIC

BUBBLE SHIELD SPECS

PART NO.		DWG. SIZE	
P401		B	
SCALE:	N/A	CAD FILE:	ILLUSTRATOR
SHEET:		1 OF 1	





LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	22-MAY-13

BULLITT

17

BUBBLE SHIELD SPECS

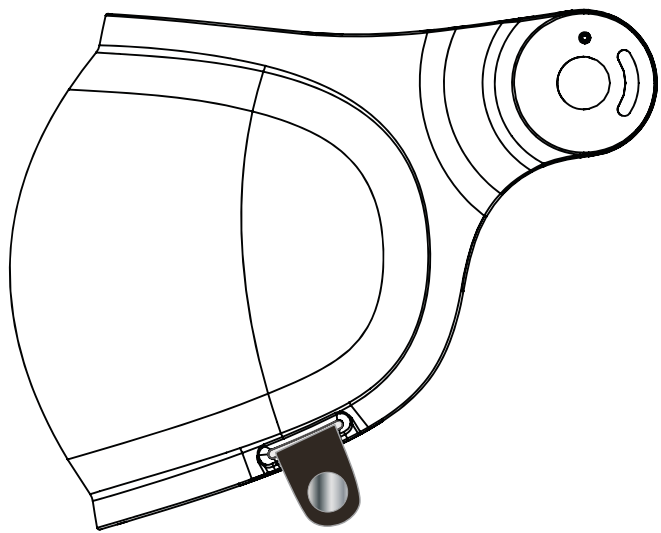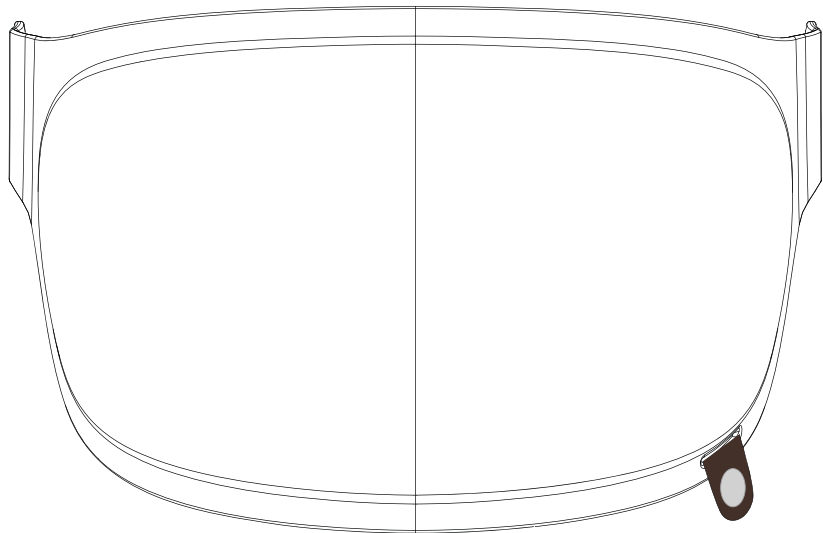

NOTES:

1. LEATHER PULL TAB ASSEMBLY MUST BE ATTACHED TO EACH SHIELD
2. ALL NON-IRIDIUM SHIELDS HAVE:

i. ANTI-FOG COATING ON INSIDE OF SHIELD (NOT CONSIDERED MIST RETARDANT)

ii. ANTI-SCRATCH COATING ON OUTSIDE OF SHIELD
3. ALL IRIIDIUM SHIELDS HAVE:

i. ANTI-FOG COATING ON INSIDE OF SHIELD (NOT CONSIDERED MIST RETARDANT)

ITEM	MATERIAL	DESCRIPTION	QTY.
1	Leather	Leather Pull	1
2	Stainless Steel Cup	Steel Cup	1
3	Neodymium	Magnet	1
4	Zinc Plated Steel	Snap Post	1
5	Acrylic	3M Sticker Pad	1

LINE	REVISION	ECO	MODEL # / HELMET NAME	CHECKED NAME	BY NAME	DT-MO-YR
POWERSPORTS	1	TBD	INITIAL RELEASE	<->	K.BAKER	20-NOV-13



WEIGHTS 19

NOTES:

- 1. HELMETS WILL BE WEIGHED COMPLETE WITH SHIELD
- 2. ANY HELMET OVER WEIGHT WILL BE REJECTED
- 3. HELMETS UNDER WEIGHT WILL REVIEWED TO DETERMINE WHY THE WEIGHT IS BELOW SPEC

PART TABLE	Shell Size	Target Weight(+/-50grams)	Weight Range
Finished, Bullitt, XSmall & Small	S	1375	1325-1425 grams
Finished, Bullitt, Medium & Large	M	1400	1350-1450 grams
Finsihed, Bullitt, XLarge & XXLarge	L	1450	1400-1500 grams

CERTIFICATION TESTING UNECE n°22 Series 05 <i>Internal Identification Test: E5HC</i>	
Job Number	MAP290116
Report	Code: Bullitt Homologation 140429 Date: 29 April 2014
Manufacturer	Name: Xiamen Yeu Chuan Composite Technology Co., Ltd. Address: No. 60. Xingnan Road, Xinglin, Jimei- Xiamen, China
Representative	It does not apply
Sample	Helmet model: BULLITT Approval n°: - Stickers from n°: - to n°: - Batch n°: - Arrival date: 17/04/2014 Testing date: 29/04/2014

Essential Technical Data	
SIZE RANGE	XS(54) to XXL (63)
SHELL MATERIAL	ABS
WEIGHT	1325 -1500 according to size [gr]
RETENTION SYSTEM	DD
REFLECTIVE BANDS	Yes

ENVIRONMENTAL CONDISTIONS	Temperature	24°
	Humidity	60%

Used Machine	Identifier /Manufacturer	expiry Date
M0015 Tracking point of impact	LTB 1079 (AD Engineering)	Daily Check IO 7.2.13
A0059/M0003 Shock absorption	MAU 1006E/DLS 9000 (AD Engineering)	23/09/2014
M0044 Chin strap resistance	MSD 1009 (AD Engineering)	10/10/2014
M0001 Conditioning chamber: Freezer	T616/40 (OCRAS E ZAMBELLI)	11/09/2014
M0075 Conditioning chamber: Oven	ABX 700NE(IARP)	11/09/2014
M0030 Compressibility	CTE 1068 (AD Engineering)	21/05/2015
M0033 Chin strap efficiency	ROL 1103/E (AD Engineering)	27/05/2015

The helmet was tested in the different configurations with internal sun visor and other critical components.

BULLITT



GENERAL SPECIFICATION TEST			
Sizes:		XS (54/55)-S (55/56) M (57/58)-L 58/59 XL (60/61)-XXL (62/63)	
Reference	General Specification	Result	
		Pass (or N/A)	Fail
6.1	Hard shell	X	
6.1	Impact absorption system (see test data in this report)	X	
6.1	Retention system	X	
6.2	Marked "Does not protect chin from impacts" (if applicable)	N/A	
6.4.1	Extent of protection	X	
6.4.2	Nape cylinder	X	
6.4.3	Protective padding	X	
6.5	Outer round surface – Auditive faculties	X	
6.6	Projections (2 mm)	X	
6.7	Rivets (h 2 mm, r 1 mm; h 2mm, r 2mm)	X	
6.8	Helmet interior	X	
6.9	Assembly	X	
6.10	Chin strap abrasion	X	
6.11 - 6.11.1	Retention system – Chin strap breadth (20 mm)	X	
6.11.2	Under-chin	X	
6.11.3	Chin strap regulation system	X	
6.11.4	Rigid parts	X	
6.11.5	Buckle – "Double D" or "Roll"	X	
6.11.6	Open strip	NAP	
6.11.7	Quick release (general requirement)	NAP	
6.11.8	Quick release (tests par. 7.3, 7.6, 7.7)	NAP	
6.11.9	Wrong buckle use	X	
6.12	Material properties (manufacturer declaration)	X	
6.13	Helmet breaking	X	
6.14, 6.14.3.1 6.14.3.2 6.14.3.3	Peripheral vision:	Lateral visual clearance 105°	X
		Upward visual clearance 7°	X
		Downward visual clearance 45°	X
6.16.1 to 6.16.6	Reflective parts (see test reports)	X	

	SPECIFICATION
H.F. Size	54 to 62
Impact point	B / P / X / R / S
Anvil	Kerbstone / Flat
Conditioning [°C]	
AMB	20 °C ± 5 °C with a relative humidity of 65% ± 5%, for more than 4 hours
LOW	-20 °C ± 5 °C , for more than 4 hours and less than 6 hours
HIGH	+50 °C ± 5 °C , for more than 4 hours and less than 6 hours
UV+H ₂ O	Ultraviolet radiation by a 125-watt xenon- 48 hours Water spray 4 to 6 hours, 1 litre per minute
Speed [m/s]	7.5 m/s + 0.15 m/s (5.5 + 0.15 m/s for the S point)
HIC	≤2400
Deceleration	≤ 275

SHOCK ABSORPTION TESTS

Ref. 7.3

Helmet size XXL(63)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤2400	Deceleration ≤ 275 [g]
-	14-1110	62	B	PIA	AMB	7.52	1516	171
			X	PIA		7.54	1529	218
			P	PIA		7.50	1674	175
			R	PIA		7.52	1716	196
-	14-1111	62	B	KERB	AMB	7.52	825	144
			X	KERB		7.54	1057	191
			P	KERB		7.54	1114	152
			R	KERB		7.54	1067	135
-	14-1112	62	B	KERB	+50	7.54	899	129
			X	KERB		7.54	797	141
			P	KERB		7.54	1101	176
			R	KERB		7.54	893	117
-	14-1113	62	B	PIA	-20	7.54	1670	193
			X	PIA		7.54	1964	232
			P	PIA		7.54	1926	183
			R	PIA		7.54	1766	195
			S	PIA		5.50	658	207
-	14-1114	62	B	KERB	UV +WET	7.50	1503	187
			X	KERB		7.57	1616	211
			P	PIA		7.56	993	133
			R	PIA		7.50	935	130

1

Job Number: MAP290116

This report concerns only the tested samples and it cannot be partially reproduced without prior written permission from OMEGA s.r.l.

4/9



Helmet size XL(61)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤ 2400	Deceleration ≤ 275 [g]
-	14-1117	62	B	KERB	+50	7.54	9256	139
			X	KERB		7.52	1181	194
			P	PIA		7.60	1291	173
			R	PIA		7.50	1513	176
-	14-1118	62	B	PIA	-20	7.52	1106	164
			X	PIA		7.52	1820	241
			P	KERB		7.56	963	130
			R	KERB		7.54	1026	137
			S	PIA		5.57	627	148

Helmet size L(59)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤2400	Deceleration ≤ 275 [g]
-	14-1120	60	B	PIA	AMB	7.54	1194	177
			X	PIA		7.52	1519	213
			P	PIA		7.50	1722	180
			R	PIA		7.54	1681	189
-	14-1121	60	B	KERB	AMB	7.50	838	142
			X	KERB		7.50	1314	185
			P	KERB		7.52	1054	143
			R	KERB		7.54	1123	153
-	14-1122	60	B	KERB	+50	7.54	936	151
			X	KERB		7.54	1215	178
			P	KERB		7.54	1072	147
			R	KERB		7.54	971	127
-	14-1123	60	B	PIA	-20	7.54	1049	164
			X	PIA		7.52	1560	221
			P	PIA		7.52	1611	172
			R	PIA		7.50	1618	183
			S	PIA		5.52	801	182
-	14-1124	60	B	PIA	UV +WET	7.58	1405	178
			X	PIA		7.50	1580	220
			P	KERB		7.54	1030	145
			R	KERB		7.52	970	131

Helmet size M(57-58)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤ 2400	Deceleration ≤ 275 [g]
-	14-1127	57	B	PIA	+50	7.54	1432	181
			X	PIA		7.51	1602	231
			P	KERB		7.50	1059	139
			R	KERB		7.54	988	131
-	14-1128	57	B	KERB	-20	7.58	862	134
			X	KERB		7.60	1355	206
			P	PIA		7.60	1817	186
			R	PIA		7.65	1602	189
			S	PIA		5.56	1111	232

Helmet size S(56)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤ 2400	Deceleration ≤ 275 [g]
-	14-1131	54	B	PIA	AMB	7.54	1709	193
			X	PIA		7.52	1889	224
			P	PIA		7.54	1735	187
			R	PIA		7.54	1572	188
-	14-1132	54	B	KERB	AMB	7.50	1313	176
			X	KERB		7.52	1312	197
			P	KERB		7.59	1042	158
			R	KERB		7.57	1361	168
-	14-1133	54	B	KERB	+50	7.58	1388	178
			X	KERB		7.50	1143	177
			P	KERB		7.54	1232	159
			R	KERB		7.50	1357	167
-	14-1134	54	B	PIA	-20	7.57	1590	198
			X	PIA		7.52	1838	216
			P	PIA		7.52	1640	177
			R	PIA		7.52	1274	196
			S	PIA		5.50	1890	229
-	14-1135	54	B	PIA	UV +WET	7.57	1804	197
			X	PIA		7.50	1254	206
			P	KERB		7.54	1444	169
			R	KERB		7.52	1688	174

Helmet size XS(54-55)- BULLITT								
Sticker n°	Helmet Internal Id	H.F. Size	Impact point	Anvil	Cond. [°C]	Speed [m/s]	HIC ≤ 2400	Deceleration ≤ 275 [g]
-	14-1138	54	B	KERB	+50	7.50	1330	165
			X	KERB		7.54	1314	189
			P	PIA		7.65	1678	183
			R	PIA		7.52	1527	179
-	14-1139	54	B	PIA	-20	7.54	1207	180
			X	PIA		7.59	159	207
			P	KERB		7.57	174	190
			R	KERB		7.56	158	190
			S	PIA		5.58	883	185

RETENTION SYSTEM STRENGTH TEST Ref. 7.6					
Helmet BULLITT				Extension	
Sticker n°	Helmet Internal Id	Size	Chin strap	Dynamic 35 [mm]	Residual 25 [mm]
-	14-1119	XL	DD	23	9

ROLL OFF TEST Ref. 7.7				
Sticker n°	Helmet Internal Id	Helmet Size	Chin strap	Roll off Angle ≤ 30°
-	14-1119	XL	DD	17

RETENTION SYSTEM STRENGTH TEST Ref. 7.6					
Helmet BULLITT				Extension	
Sticker n°	Helmet Internal Id	Size	Chin strap	Dynamic 35 [mm]	Residual 25 [mm]
-	14-1129	M	DD	25	10

ROLL OFF TEST Ref. 7.7				
Sticker n°	Helmet Internal Id	Helmet Size	Chin strap	Roll off Angle ≤ 30°
-	14-1129	M	DD	19

RETENTION SYSTEM STRENGTH TEST Ref. 7.6					
Helmet BULLITT				Extension	
Sticker n°	Helmet Internal Id	Size	Chin strap	Dynamic 35 [mm]	Residual 25 [mm]
-	14-1140	XS	DD	28	8

ROLL OFF TEST Ref. 7.7				
Sticker n°	Helmet Internal Id	Helmet Size	Chin strap	Roll off Angle $\leq 30^\circ$
-	14-1140	XS	DD	19

TEST FOR PROJECTION AND SURFACE FRICTION METHOD B					
Helmet Client Id	Helmet Internal Id	Test	Tested Point	Result	
				Pass	Fail
BULLITT	14-1130	Projection	Side right	X	-
BULLITT	14-1130	Surface	TOP	X	-

RIGIDITY TEST Ref. 7.5						
Helmet BULLITT			Load Direction	Deformation [mm]		
Sticker n°	Helmet Internal Id	Size		Initial (load 30N)	Max 40 [mm] (load 630N)	Final 15 [mm] (load 30N)
-	14-1125	XXL	Longitudinal	1	19	4
-	14-1126	XXL	Transversal	1	11	2


RIGIDITY TEST Ref. 7.5						
Helmet BULLITT			Load Direction	Deformation [mm]		
Sticker n°	Helmet Internal Id	Size		Initial (load 30N)	Max 40 [mm] (load 630N)	Final 15 [mm] (load 30N)
-	14-1125	L	Longitudinal	1	17	4
-	14-1126	L	Transversal	1	8	1

RIGIDITY TEST Ref. 7.5						
Helmet BULLITT			Load Direction	Deformation [mm]		
Sticker n°	Helmet Internal Id	Size		Initial (load 30N)	Max 40 [mm] (load 630N)	Final 15 [mm] (load 30N)
-	14-1136	S	Longitudinal	1	21	5
-	14-1137	S	Transversal	1	17	4

REFLECTIVE PARTS			
		Result	
Reference	Test	Pass or N/A	Fail
6.16.2	Reflective parts (Geometry requirements)	PASS	
6.16.3	Reflective parts (Colorimetric requirements)	PASS	
6.16.4	Reflective parts (Photometric requirements)	PASS	
6.16.5	Reflective parts (Resistance to external agents requirements)	PASS	
6.16.6	Reflective parts (Compatibility of materials requirements)	PASS	

THE SAMPLES TESTED MEET THE REQUIREMENTS OF THE REFERENCE NORM.

Laboratory Technician
(Adolfo Garlando)

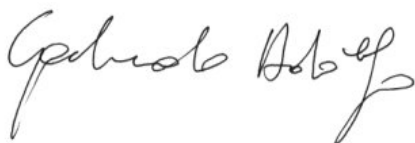

Laboratory Manager
(Juan Pablo Cuesta)



ANNEX 4

DECLARATION OF PROPER PROCEDURES

VCA JOB NUMER: MAP290116

MANUFACTURER: Xiamen Yeu Chuan Composite Technology Co., Ltd.

TYPE: Bullitt

The undersigned confirms that the tests conducted under the above job number have been carried out in accordance with the requirements of the specified Regulation/Directive and the Memorandum of Understanding between OMEGA S.R.L. and VCA relating to type approval testing.

The undersigned has not been involved in any design nor development work on the products to be approved nor, any related product.

SIGNED:



NAME (in capitals): J.P. CUESTA RUIZ

DATE: 8th July 2014